


# VECTOR OPTICS

---

## Vector optics sentinel 6-24x50



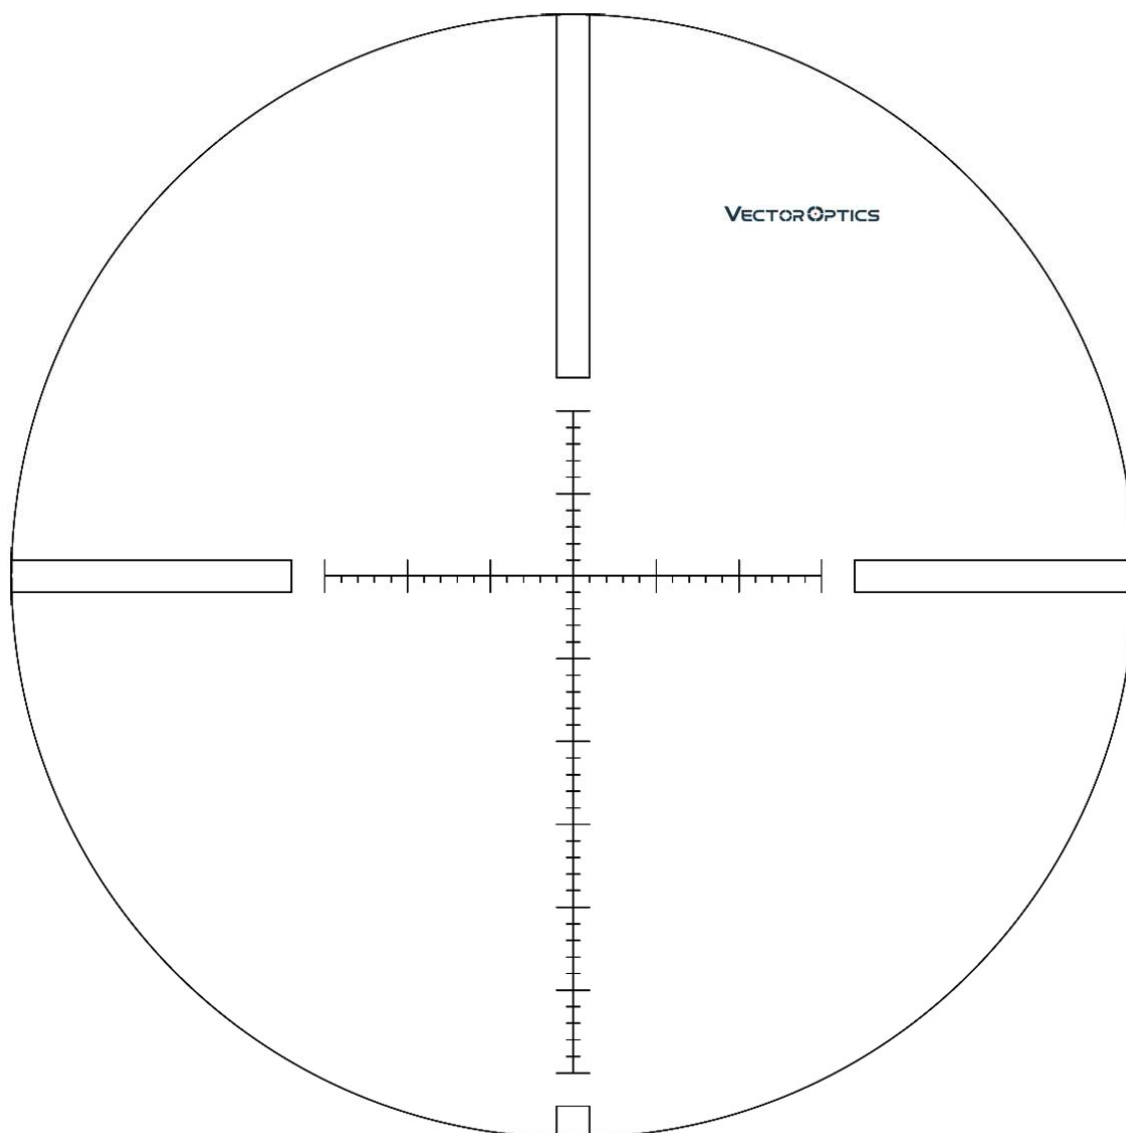

## Product Description


Magnification	6-24x
Objective Lens Dia	50mm
Ocular Dia	44mm (1.7 inch)
Ocular Length	67mm (2.6 inch)
Exit Pupil	2.1-8.3 mm
Overall length	385mm (15.1")
Weight (net)	755g (26.6 Ounce)
Eye Relief	80-100mm (3.1-3.9 Inch)
FOV (@100yds)	0.49-3.9°
FOV (ft@100yds)	4.3-16.5
Reticle	MP reticle
Elevation Range	± 25 MOA
Windage Range	± 25 MOA

Number of Lens	12 pieces
Distance between objective lens part and middle turret	60mm (2.4 inch)
Length of middle turret part	61mm (2.4 inch)
Distance between middle turret parts to power ring	40mm (1.6 inch)
Optical Coating	Fully-Multi diamond coated, sharp clear

- Side wheel parallax scope designed for sophisticated shooter to achieve highly accurate, Min at 15Yards
- Stepless brightness green and red illumination system
- 30mm monotube
- Shock proof, water proof and fog proof (Nitrogen purged)
- High quality aluminum alloy in durable black matte finish
- Feature 1/8 M.O.A direct high finger windage and elevation turrets adjustments
- Turret lock feature: press down to lock without click movement
- Fast focus eyepiece at ocular lens adjustment (diopter compensation -2.5dpr to +2dpr)

### **Vector Optics Sentinel 10-40x50**



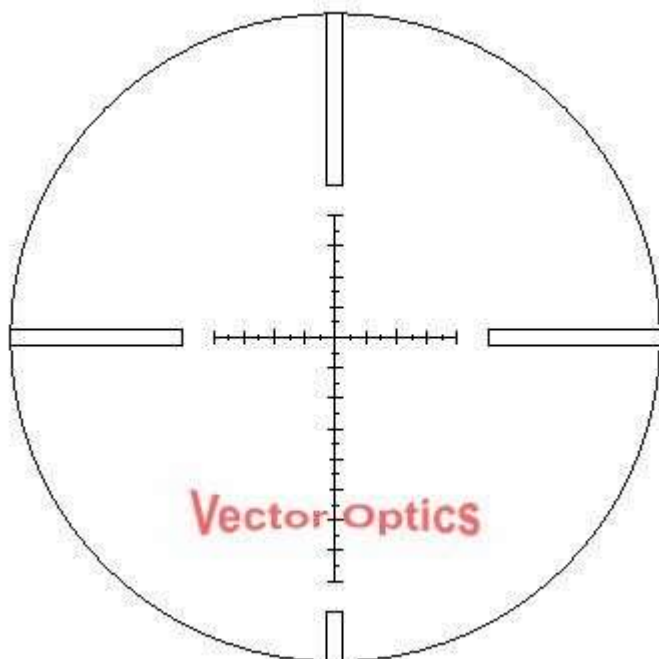

## Product Description

Magnification	10-40x
Objective Lens Dia	50mm
Ocular Lens Dia	44mm (1.7 inch)
Ocular Length	67mm (2.6 inch)
Exit Pupil	5.0-1.25 mm
Length	414mm (16.3")
Weight (net)	745g (26.3 ounce)
Eye Relief	85-92mm (3.3-3.6 inch)
Field of View (@100yds)	1.1-3.8°
Optics Coating	Fully Multi Coated
Number of Lens	12 pieces
Reticle	Etched Glass MP reticle
Evaluation Range	45 MOA
Windage Range	45 MOA
Battery	CR2032 (not include)
Distance between objective lens part and middle turret	68mm (2.7 inch)
Length of middle turret part	40mm (1.6 inch)
Distance between middle turret parts to power ring	42mm (1.6 inch)
Side focus	Min at 10 Yards to infinite

- Stepless brightness green and red illumination system
- 30mm monotube
- Shock proof, water proof and fog proof (Nitrogen purged)
- High quality aluminum alloy in durable black matte finish
- Feature 1/8 M.O.A direct high finger windage and elevation turrets adjustments
- Turret lock feature: press down to lock without click movement
- Fast focus eyepiece at ocular lens adjustment (diopter compensation -2.5dpr to +2dpr)

## **Taurus 3-18x50FFP Riflescope**

**Magnification: 3-18x**

**Objective Lens Dia: 50mm**

**Ocular Lens Dia: 36mm**

**Ocular Lens Length: 60mm**

**Exit Pupil: 16.6-2.7mm**

**Length: 335mm (12.2 inch)**

**Weight (net):750g (26.5 ounce)**

**Eye Relief: 100mm (4.0 Inch)**

**Field of view (@100yds):32.9-5.8 feet**

**Optics Coating: Diamond fully-Multi**

**Reticle: Etched glass MPX1**

**Tube: 30mm hammer-forged**

**Elevation Range:≥17.5MIL (60MOA)**

**Windage Range:≥17.5MIL (60MOA)**

**Click Value: 1/10 MIL, 1cm, 0.1 MRAD**

**Parallax Adjustment:15 yds to ∞**

**Illumination: 6 levels red**

**Battery: CR2032**

**30mm hammer-forged aluminum monotube design**

**Side focus mark: 15, 20, 25, 30, 40, 50, 60, 75, 100, 150, 200, 500 and infinite**

**Shock tested to 1000g, water proof and fully nitrogen purged**

**Turret lock system. Pull to adjust, press to lock. Two extra elevation turrets marked 1cm and 0.1 MRAD**

**High quality 6061 T6 aircraft grade aluminum**

**Diopter compensation from fast-focus eyepiece -2 to +1.5**



**Vector Optics FFP range**


**VO Taurus 4-24 x 50**









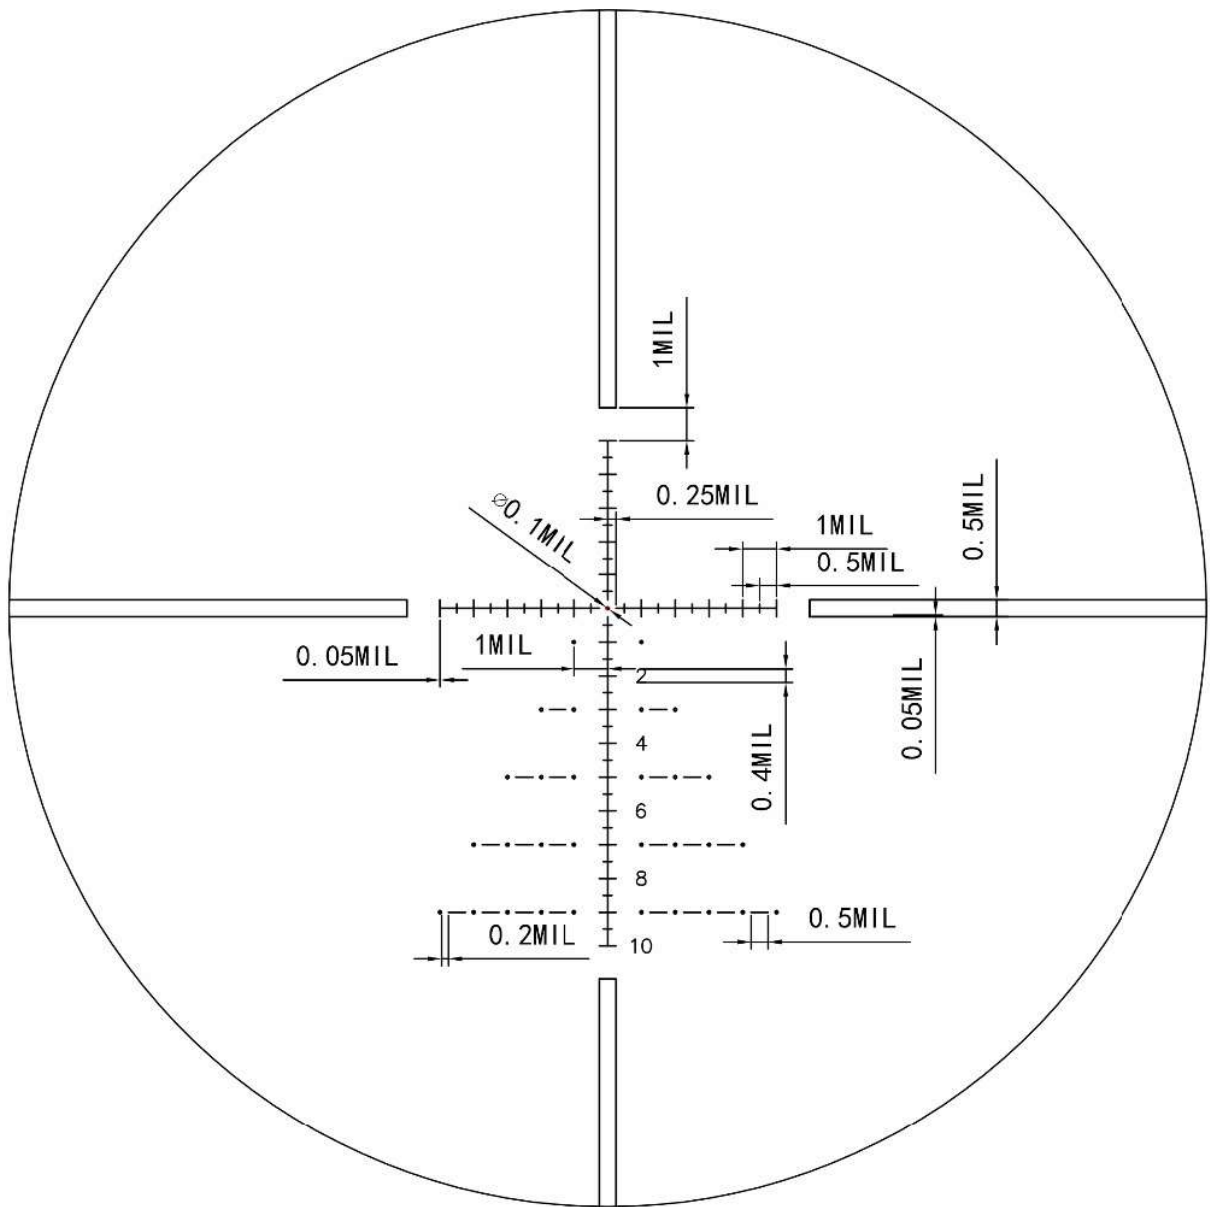


**VO 6-30 x 56 FFP Taurus SOLD OUT**

65 Yds



10x Power at Close Range

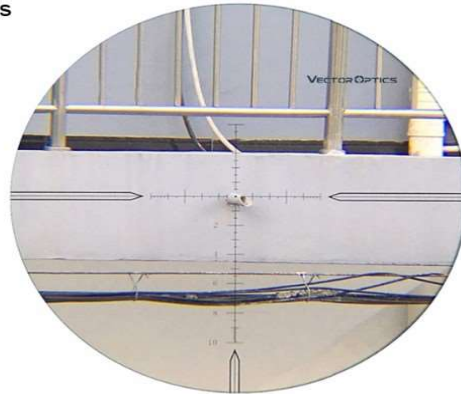


24x Power at Close Range

415 Yds



10x Power at Long Range

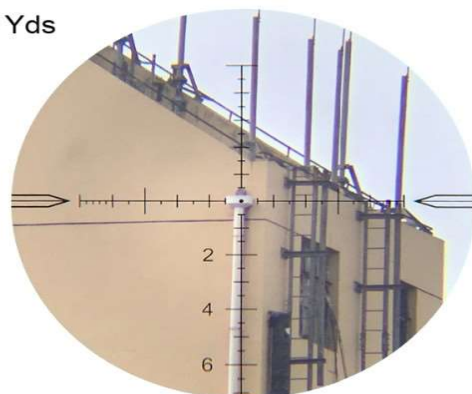

24x Power at Long Range



**Bubble Level included by Taurus and Paragon scopes.**





**Vector Optics hunting line of scopes**

**Grizzly 3-12x56E Riflescope**





415 Yds

15x Power at Mid-Long Range



65 Yds

8x Power at Close Range

## Vector Optics Grizzly 3-12x56E Riflescope (SCOM-09)


30mm Monotube, Etched Glass Reticle, 3" Sunshade

- Code: SCOM-09 Grizzly
- Magnification: 3-12x
- Objective Lens Dia: 56mm
- Ocular Lens Dia: 35mm
- Ocular Length: 65mm
- Exit Pupil: 4.66-18.67 mm
- Length: 340mm (13.4 inch, without 3 inch sunshade)
- Weight (net): 692g (24.4 ounce, without sunshade)
- Eye Relief: 100-85 mm (3.9-3.4 Inch)
- Field of View (@100yds): 1.9-5.8°

- Num of Lens: 10
- Optics Coating: Fully-Multi Coated to eliminate glare and maximize light transmission
- Reticle: Etched Glass Reticle
- Evaluation Range:  $\pm 35$  MOA
- Windage Range:  $\pm 35$  MOA
- 11 Level Red Illumination System
- 30mm Monotube
- Shock proof (1000g), Water Proof and Fog Proof (Nitrogen Purged)
- High quality aluminum alloy in durable black matte finish
- Feature 1/4" direct low finger windage and elevation adjustments with audible clicks for greater precision
- Diopter adjustment at ocular lens
- Free Fitting involved: 30mm weaver (default) or dovetail mount, Rubber caps and 3 inch sunshade

## **Tourex 6-24x50**

**Item No :SCFF-19**

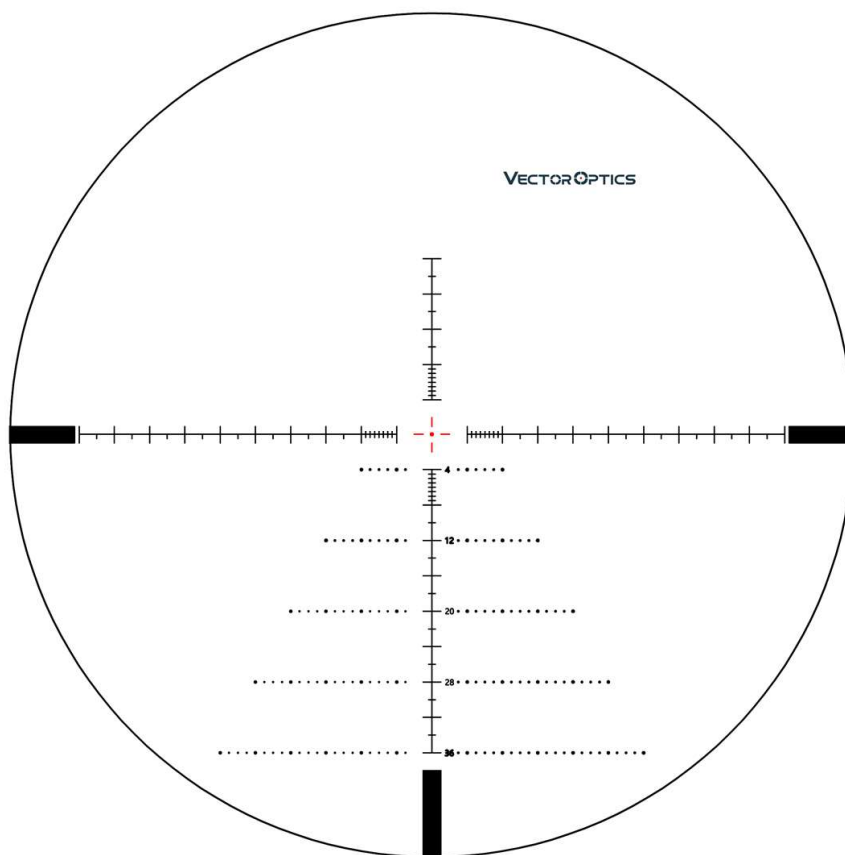







**Magnification: 6-24x**  
**Objective Lens: 50mm**  
**Ocular Lens Dia.:38mm**  
**Ocular Lens Length: 58mm**  
**Exit Pupil: 8.3-2.1mm**  
**Optics Coating: Fully multi coated**  
**Field of View: 18.3-4.6 feet @ 100 yards**  
**Eye Relief: 4.13-3.93" 105-100mm**  
**Length: 365mm (14.3")**  
**Weight: 745g 26.3(oz)**  
**Tube Dia.:30mm**  
**Click Value: 1/4 MOA**  
**Elevation Range: 50MOA**  
**Windage Range: 50MOA**  
**Parallax: 10 yds to infinite**  
**Parallax Setting: 100 yards**  
**Reticle: VML-1**  
**Illumination: 6 levels R**  
**Finish: Black matte**  
**Compact, light weight and durable**  
**Middle turret part: 38mm (1.5")**  
**Middle turret part to power ring: 55mm (2.2")**  
**Middle turret part to objective lens: 60mm (2.4")**  
**Shock tested to 750g and water resistant**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: scope rings, flip-up caps, retail package and cleaning cloth etc.**

## **Vector Optics Red Dot Sights**

### **Frenzy 1x20x28 Red Dot Sight**











**The extra-large window size 20x28mm 0.8x1.1". You will see more!**  
**6061-T6 aluminum housing in rug construction light weight 56g 2.0oz**  
**3MOA dot size with 8 Levels & 2 NV red dot intensity**  
**Weaver mount & compatible for VT footprint (can do TRI footprint too)**  
**>40,000 hours for NV dot & >20,000 hours for weakest visible dot**  
**IPX6 water proof up to 1 meter depth for 30 minutes**  
**Take 9mm, 45CAP, 12GA and Lapua Magnum 338 Recoil**  
**Clear lens with premier and protective coatings**  
**On/off switches on side, complete user control and 4 hours auto shut-down**

**Magnification: N/A**  
**Window Lens Size: 20x28mm (0.8x1.1")**  
**Length: 46mm / 1.8"**  
**Width: 32mm / 1.2"**  
**Height: 35mm / 1.4"**  
**Weight (net): 56g / 2.0oz**  
**Eye Relief: Free**  
**Optics Coating: Multi Coated**  
**Parallax:  $\pm 1.0$  MOA 100 yds**  
**Elevation Range: 45 MOA**

Windage Range: 45 MOA  
Dot Size: 3 MOA  
Dot Intensity: 8 levels & 2 night vision dot  
Mounting: Weaver, VT  
Battery Type: CR2032  
Battery Runtime: ≥20000 hours  
Finish: Black matte  
For close-in work and general shooting  
Real water proof at 1 meter with 30 minutes IPX6  
4 Hours Auto Shut Down  
Pistol application for VT footprint, and can do TRI footprint too  
High quality aluminum alloy 6061 T6 in durable black matte finish  
>20,000 hours battery runtime (at weakest visible dot level)  
Tested on 9mm Pistol, 338 Lapua Magnum rifle and 12 GA shotgun  
Package includes: retail package, weaver mount, rubber lens cover, hex keys and cleaning cloth etc

### **Stinger 1x28 Red Dot Sight**



**Red / Green Dot, Cantilever Picatinny Mount, Fit for Real Fire Caliber and Ammunition**



- Magnification: N/A
- Objective Lens Dia: 28mm
- Dot Size: 5 MOA
- Exit Pupil: 28 mm
- Length: 125mm (4.9 inch)
- Weight (net): 200g (7.1 ounce)
- Eye Relief: free
- Optics Coating: Multi Coated
- Reticle: 5 levels red and green dot
- Elevation Range: 80 MOA
- Windage Range: 80 MOA
- 30mm Monotube
- Shock proof, Water Proof and Fog Proof
- High quality aluminum alloy in durable black matte finish
- Feature 1/2" windage and elevation at 50 yards
- Free fitting: 30mm cantilever picatinny mount, flip-up caps


- 
- Vendor: Vector Optics
  - SKU: SCRD-05

### Wraith 1x22x33 Red Dot Sight

Item No :SCRD-17





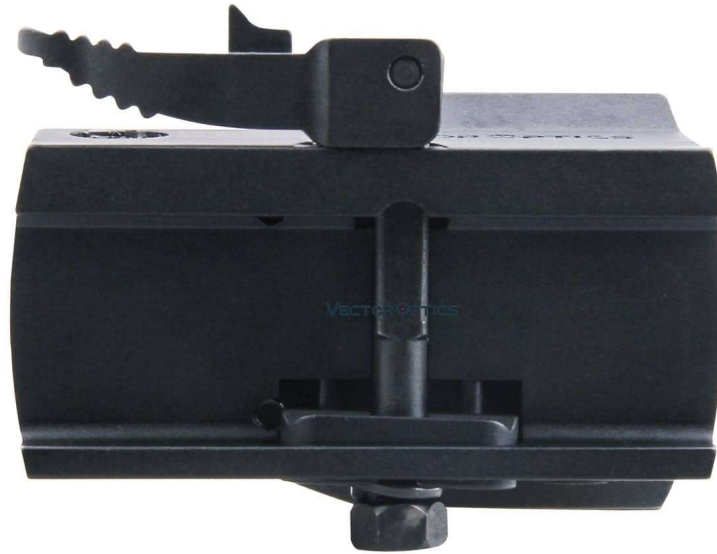


**Magnification: N/A**  
**Tubeless Sight Window Lens Size: 22x33mm**  
**Exit Pupil: 22-23mm**  
**Length: 66mm (2.6 inch)**  
**Width: 40mm (1.6 inch)**  
**Height: 42mm (1.7 inch)**  
**Weight (net):115g (4.0 ounce)**  
**Eye Relief: Free**  
**Optics Coating: Multi Coated**  
**Brightness levels: 6**  
**Parallax :< 3' at 50 yards**  
**Elevation Range: 40 MOA**  
**Windage Range: 40 MOA**  
**Red dot and invisible night vision dot**  
**Shock proof, Rain Proof and Fog Proof**  
**High quality aluminum alloy in durable black matte finish**  
**Feature 1 MOA windage and elevation adjustments with audible click**  
**Integrated 21mm picatinny mount base**  
**Free fitting involved: cleaning cloth and hex keys**

## Calypos 1x30SFP Prism Scope Riflescope

Item No :SCOC-25



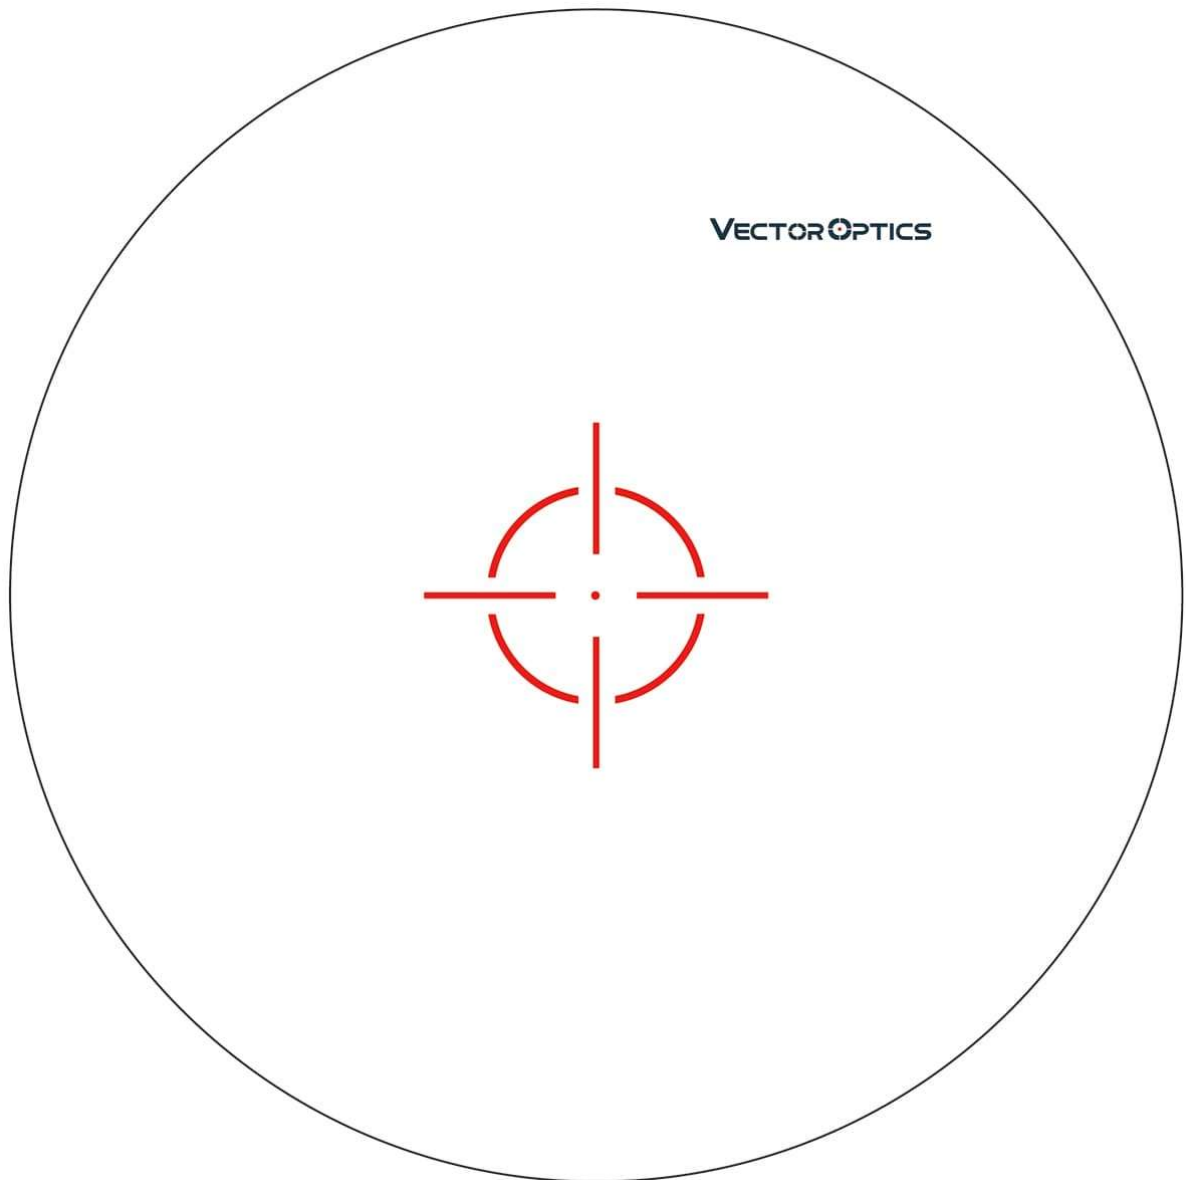

**Crystal Clear Prism Scope With FMC Prism Offers Distortion Free and Edge-to Edge Image,**

**True One Power Two eyes Open Prism Scope w/ Incredible Optical Quality, 3.9" Long Eye Relief, >14° F.O.V Wider Than Most Other Similar Sights,**

**11 Levels Illumination Very Bright & Very Dim (Fit NV), 1/2 MOA Adjustment,**

**Very Compact CQB Scope 103mm 4.1" Length Featuring .223 5.56x45mm Cartridge**

**The 3MOA Center Dot with Ring Illuminated Reticle Optimize the Ultra Fast Shooting Performance**

**IPX6 Waterproof Built By Heavy Duty Rugged Aluminum Housing, Absolute Confidence**


**It is really a MUST for your fast target acquisition in close to medium range shooting.**

**Magnification: 1x  
Objective Lens: 30mm  
Exit Pupil: 16-14mm  
Optical Coating: Fully multi coated  
Field of View: >14°  
Field of View: 24.9m @ 100 meters  
Eye Relief: 98-94mm / 3.9-3.7 inch  
Click Value: 1/2MOA  
Elevation Range: 120MOA  
Windage Range: 120MOA  
Height: 36mm (1.41") from bottom to center  
Length: 103mm / 4.1 inch  
Weight: 335g / 11.8oz  
Reticle: Etched VEP-ROD  
Parallax Setting: 100 yards  
Finish: Black matte  
Illumination: 11 levels red  
Battery Type: CR2032  
Shock proof and fog proof (nitrogen filled)  
High quality aluminum alloy in durable black matte finish  
Fast focus eyepiece at ocular lens adjustment -2 to 2  
Integrated Mount for 21mm picatinny rail  
Accessories includes: flip-up caps, plastic adjustment wrench, hex keys and cleaning cloth etc**

## **Calypos 3x32SFP Prism Scope Riflescope**

***Item No :SCOC-20***



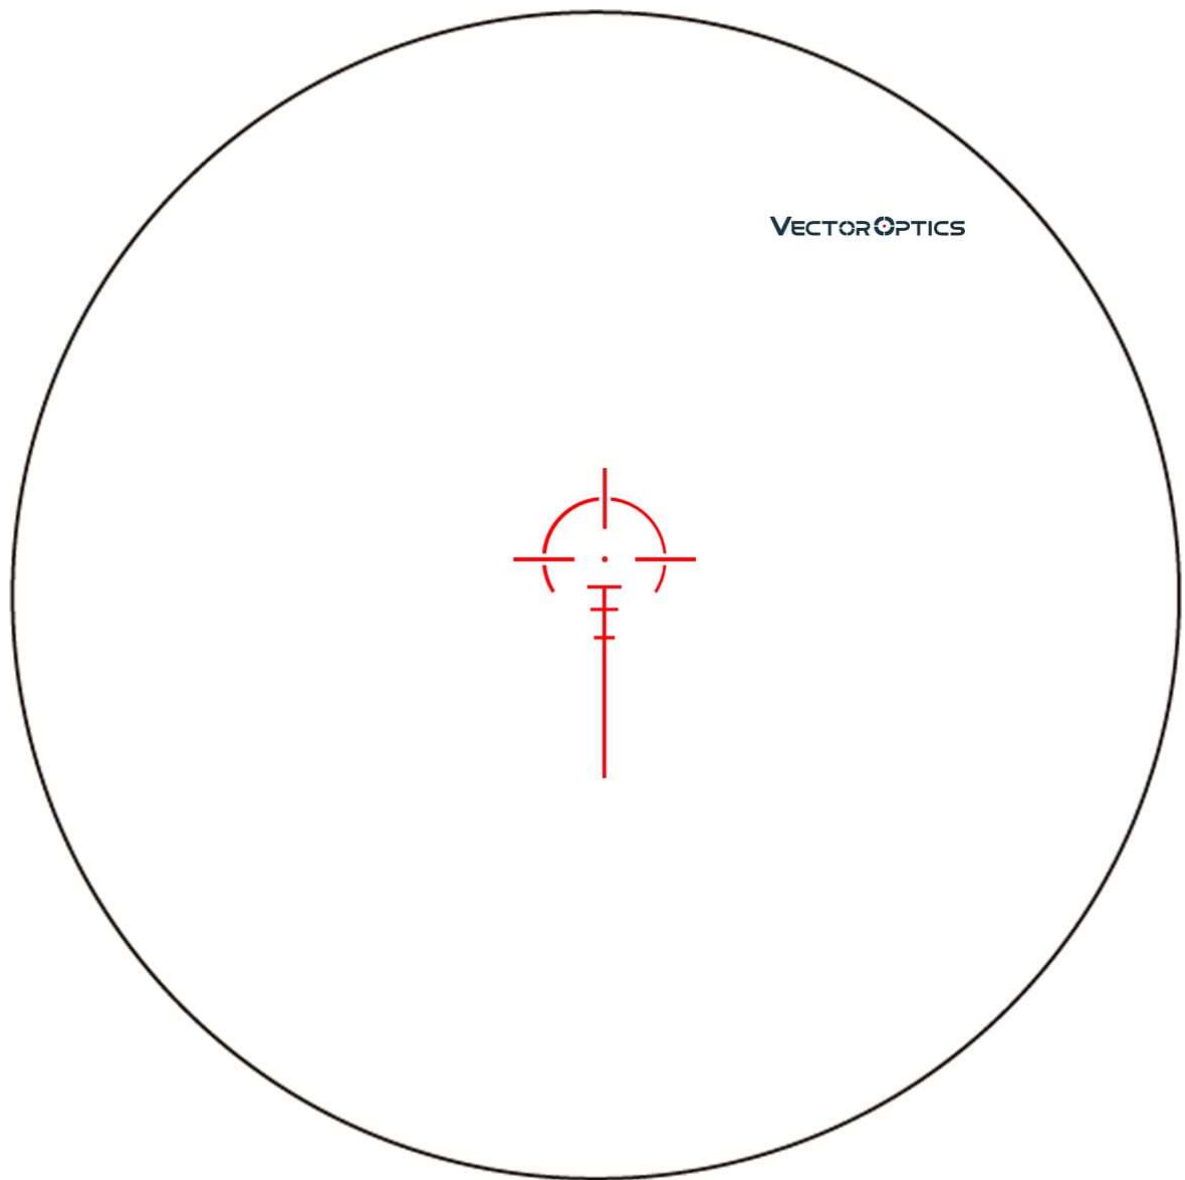

**Crystal Clear Prism Scope With Fully Multi Coated Prism Offers Distortion Free and Edge-to Edge Image**

**>3" Long Eye Relief, >6.5° F.O.V Wider Than Most Other Similar Sights**

**11 Levels Illumination Very Bright & Very Dim (Fit NV), 1/2 MOA Adjustment**

**Very Compact CQB Scope 140mm 5.5" Length Featuring .223 5.56x45mm Cartridge**

**BDC Reticle Directly Etched On The Prism Provides Holdover & Ranging Reference From 0-500 Yards**

**IPX6 Waterproof Built By Heavy Duty Rugged Aluminum Housing**

**It is really a MUST for your fast target acquisition in close to medium range shooting**

**Magnification: 3x**  
**Objective Lens: 32mm**  
**Exit Pupil: 10-8mm**  
**Optical Coating: Fully multi coated**  
**Field of View: >6.5°**  
**Field of View: 11.39m @ 100 meters**  
**Eye Relief: 76mm / 3.0 inch**  
**Click Value: 1/2MOA**  
**Elevation Range: 90MOA**  
**Windage Range: 90MOA**  
**Length: 140mm / 5.5 inch**  
**Weight: 435g / 15.4oz**  
**Reticle: Etched VEP-CDB**  
**Parallax Setting: 100 yards**  
**Finish: Black matte**  
**Illumination: 11 levels Red**  
**Battery: CR2032**  
**Shock proof and fog proof (nitrogen filled)**  
**High quality aluminum alloy in durable black matte finish**  
**Fast focus eyepiece at ocular lens adjustment -2 to 2**  
**Interated Mount for 21mm picatinny rail**  
**Accessories includes: flip-up caps,**  
**plastic adjustment wrench, hex keys and cleaning cloth etc**

## **NEW Aston 1-6x24SFP**

**Magnification: 1-6x**  
**Objective Lens Dia.: 24mm**  
**Ocular Lens Dia.: 36mm (1.4 inch)**  
**Ocular Lens Length: 54mm (2.1 inch)**  
**Exit Pupil: 24.0-4.0mm**  
**Optics Coating: Fully-multi coat diamond clear**  
**Field of View: 111.2-17.8 feet@ 100 yards**  
**Resolution: 7.32"**  
**Eye Relief: 90mm (3.5 inch)**  
**Length: 265mm (10.4 inch)**  
**Weight: 470g (16.6 ounce)**  
**Tube Dia.: 30mm Monotube**  
**Click Value: 1/2 MOA**  
**Elevation Range: >90MOA**  
**Windage Range: >90MOA**  
**Parallax Setting: 100 yards**  
**Reticle: Etched glass VTC-A**  
**Illumination: 11 gear**  
**Battery: CR2032**  
**Length of middle turret part: 37mm (1.4 inch)**  
**Distance between middle turret part to power ring: 58mm (2.3 inch)**  
**Shock tested to 750g, water proof at 1m**

Fully nitrogen purged to eliminate any fogging of the lenses internally

Black matte anadized

Turret can be zero re-set

High quality 6061 T6 aircraft grade aluminum

Diopter compensation from fast-focus eyepiece (+2 to -2)


Including items: 30mm picatinny low ring (default) or weaver or dovetail mount, lens caps and cleaning cloth etc.








VECTOROPTICS

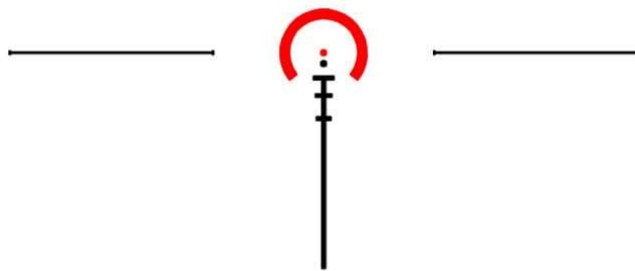

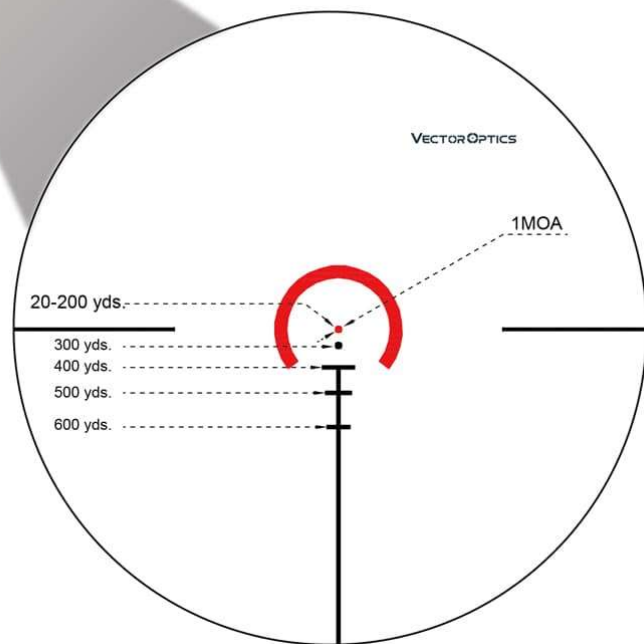


## **Aston 5-30x56SFP Riflescope**


*Item No :SCOL-24*

Magnification: 5-30x  
Objective Lens Dia.: 56mm  
Ocular Lens Dia.: 36mm (1.4 inch)  
Ocular Lens Length: 58mm (2.1 inch)  
Exit Pupil: 11.2mm-1.87mm  
Optics Coating: Fully-multi coat diamond clear  
Field of View: 19.93-3.3 Feet @ 100 yards  
Resolution: 5.5"  
Eye Relief: 124-86mm (4.9-3.4 inch)  
Length: 400mm (15.7 inch)  
Weight: 835g (29.5 ounce)  
Tube Dia.: 30mm Monotube  
Click Value: 1/4 MOA  
Elevation Range: >50MOA  
Windage Range: >50MOA  
Parallax Setting: 100 yards  
Side Focus: 20 Yds to infinite  
Reticle: Etched glass VPA-A  
Illumination: 11 gear Red  
Battery: CR2032  
Distance between objective lens part and middle turret: 55mm (2.1 inch)  
Length of middle turret part: 38mm (1.5 inch)  
Distance between middle turret part to power ring: 55mm (2.1 inch)  
MOA reticle etched glass  
Shock tested to 750g, water proof at 1m  
Fully nitrogen purged to eliminate any fogging of the lenses internally  
Turret lock system  
High quality 6061 T6 aircraft grade aluminum  
Focus mark: 20, 30, 40, 50, 100, 150, 300, 600 and infinite  
Diopter compensation from fast-focus eyepiece (+2 to -2)  
Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, lens caps and cleaning cloth etc.





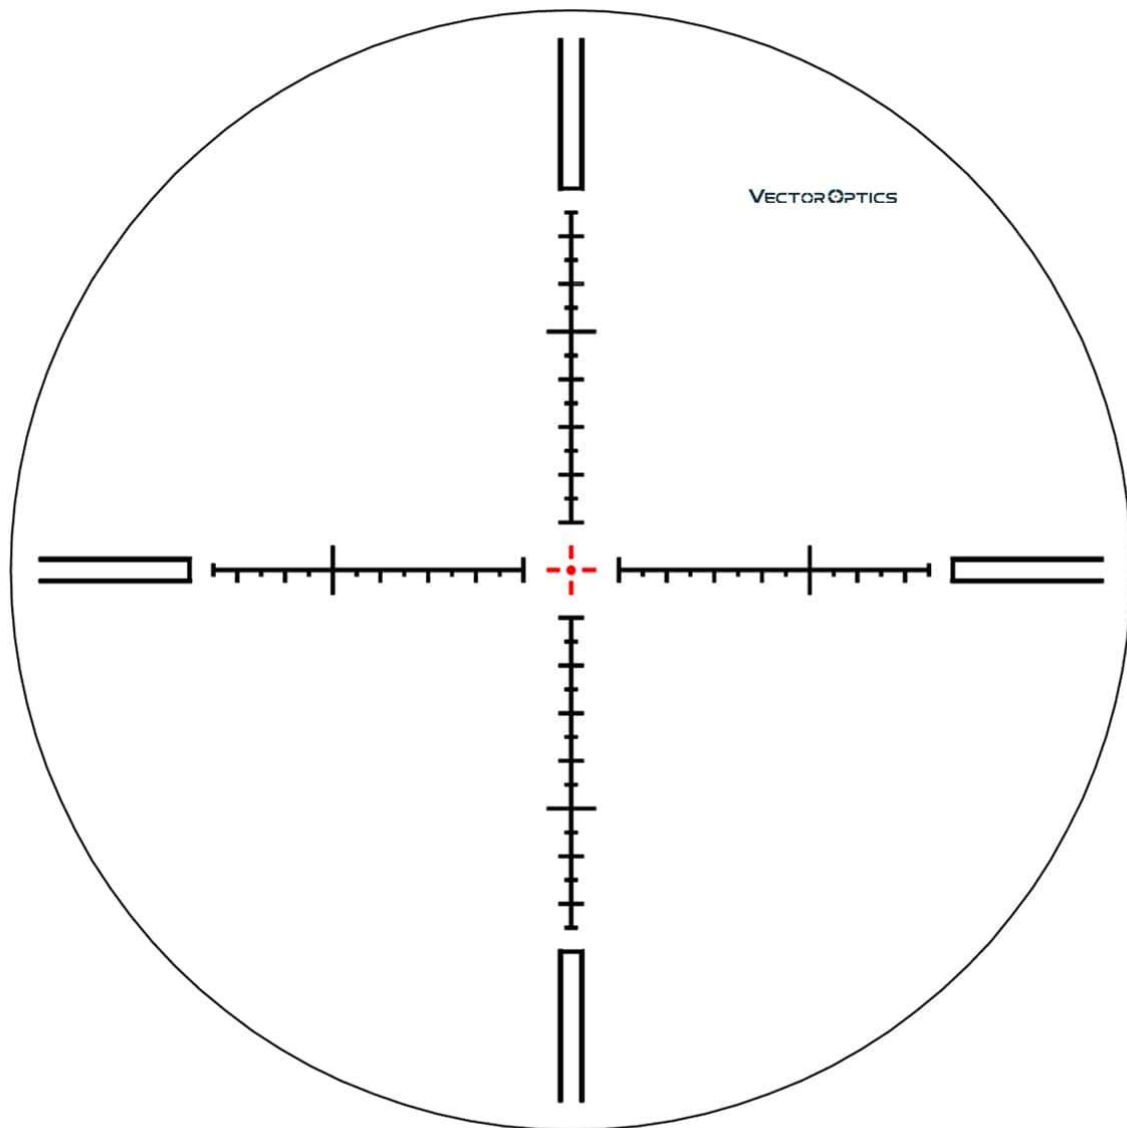

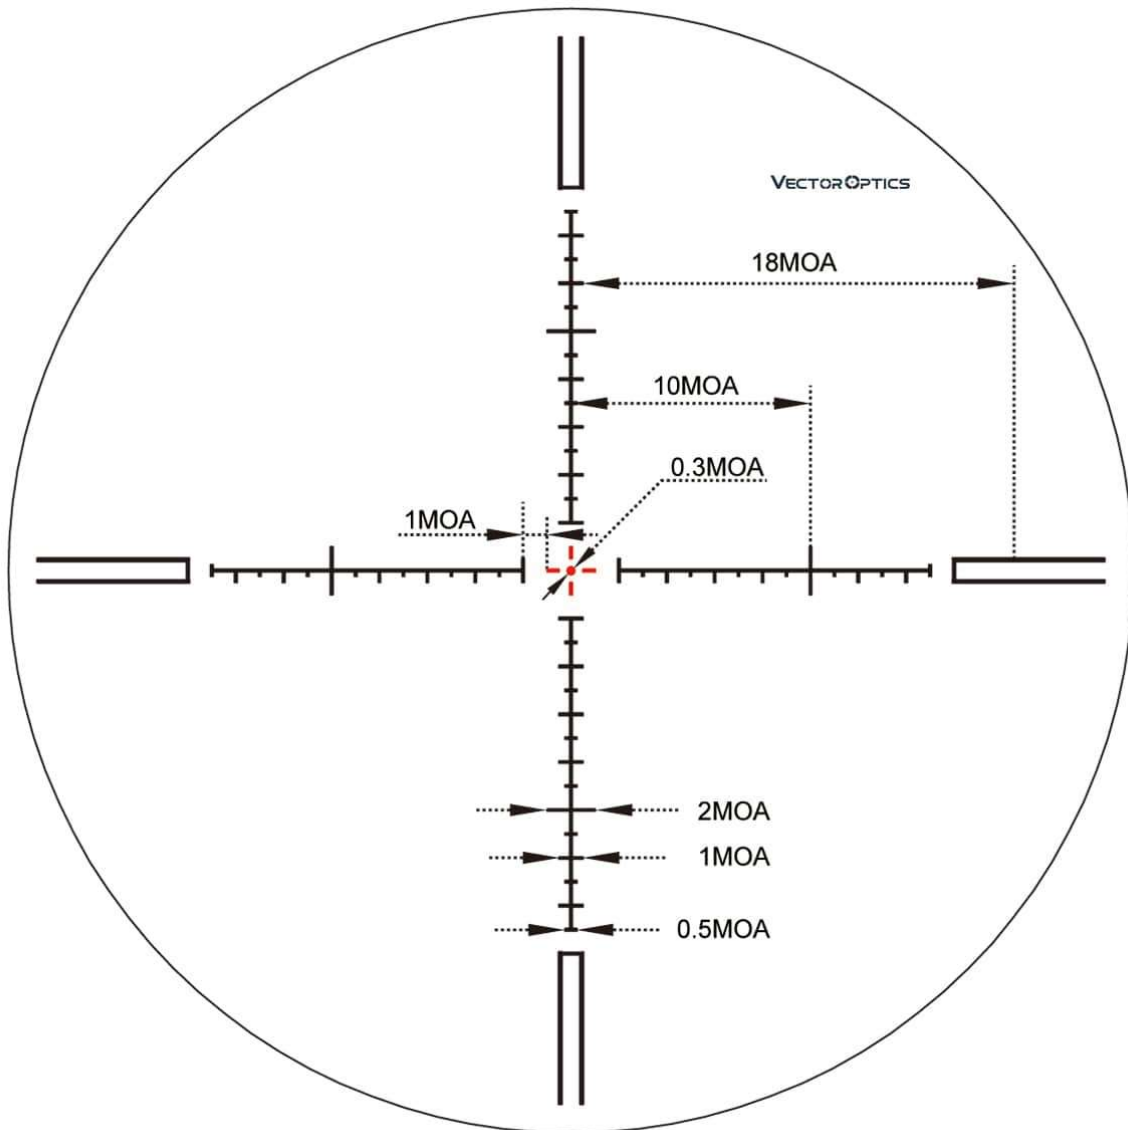



## **Continental 1-6x24SFP Riflescope**

***Item No :SCOC-23***

**Magnification: 1-6x**

**Objective Lens Dia.:24mm**

**Ocular Lens Dia.:42mm (1.7 inch)**

**Ocular Lens Length: 54mm (2.1 inch)**

**Exit Pupil: 9.5-4.0mm**

**Optics Coating: Fully-multi coat diamond clear**

**Field of View: 124.5-20.7 feet @ 100 yards**

**Field of View: 42-7.0 meters @ 100 meters**

**Eye Relief: 100mm (4.0 inch)**

**Length: 283mm (11.1 inch)**

**Weight: 480g (16.9 ounce)**

**Tube Dia.:30mm Monotube**

**Click Value: 1/2 MOA**

**Elevation Range: 140 MOA**

**Windage Range: 140 MOA**

**Parallax Setting: 100 yards**

**Reticle: Etched glass VET-10BDC**

**Illumination: 6 gear**

**Battery: CR2032**

**Distance between middle turret parts to power ring: 58mm (2.3 inch)**

**Shock tested to 750g, water proof at 1m**

**Light transmission reach to 90%**

**Fully nitrogen purged to eliminate any fogging of the lenses internally**

**Adjust plate is NOT fixed, after zero the scope pull up the turret and re-set to zero**


**High quality 6061 T6 aircraft grade aluminum**

**Turret lock feature: press down to lock without click movement**

**Diopter compensation from fast-focus eyepiece (+2 to -3)**

**Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, lens caps and cleaning cloth etc.**



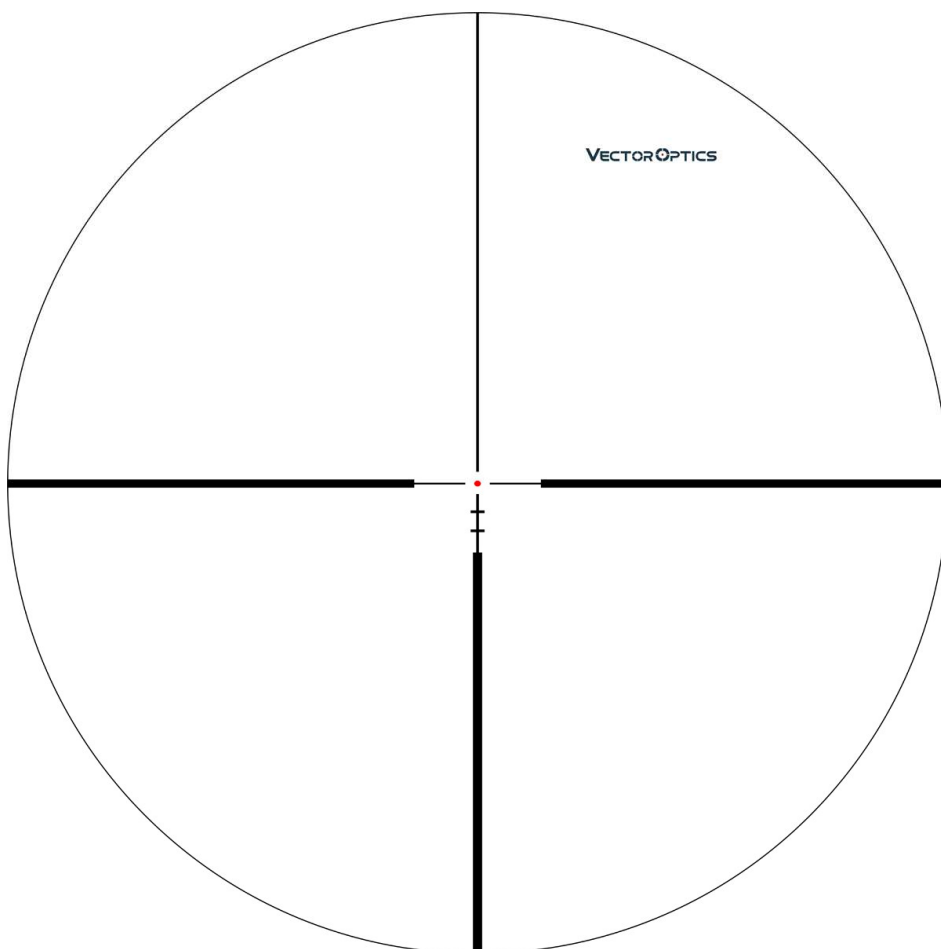




## **Continental 1.5-9x42SFP Riflescope SOLD OUT**

**Item No :SCOM-23**

**Magnification:1.5-9x**  
**Objective Lens Dia.:42mm**  
**Ocular Lens Dia.:42mm (1.7 inch)**  
**Ocular Lens Length:54mm (2.1 inch)**  
**Exit Pupil:9.5-4.9mm**  
**Optics Coating:Fully-multi coat diamond clear**  
**Field of View:84-14 Feet @ 100 yards**  
**Field of View:28-4.6M @ 100 meters**  
**Eye Relief:100mm (4.0 inch)**  
**Length:335mm (13.1 inch)**  
**Weight:580g (20.5 ounce)**  
**Tube Dia.:30mm Monotube**  
**Click Value:1/4 MOA**  
**Elevation Range:140MOA**  
**Windage Range:140MOA**  
**Parallax Setting:100 yards**  
**Reticle:Etched glass VET-10BDC**  
**Illumination:6 gear**  
**Battery:CR2032**  
**Distance between objective lens part and middle turret: 52mm (2.0 inch)**  
**Length of middle turret part: 35mm (1.4 inch)**  
**Distance between middle turret part to power ring: 56mm (2.2 inch)**  
**Shock tested to 750g, water proof at 1m**  
**Light transmission reach to 90%**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**Adjusting plate is NOT fixed, after zero the scope pull up the turret and re-set it to zero**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -3)**





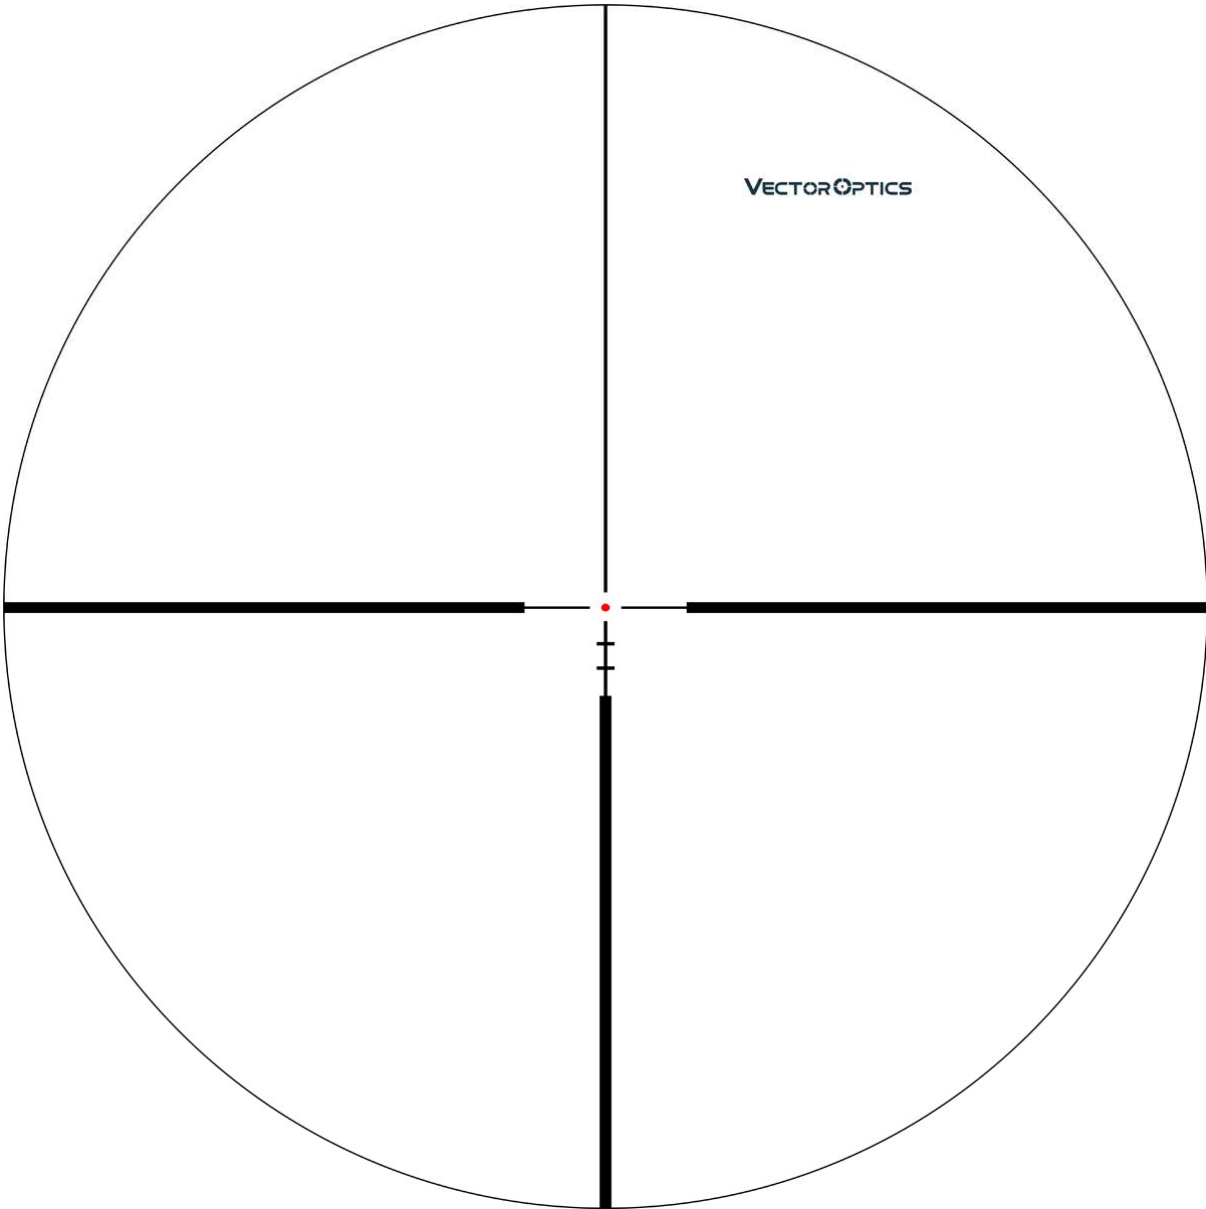




## Continental 2-12x50SFP Riflescope SOLD OUT

*Item No :SCOM-15*



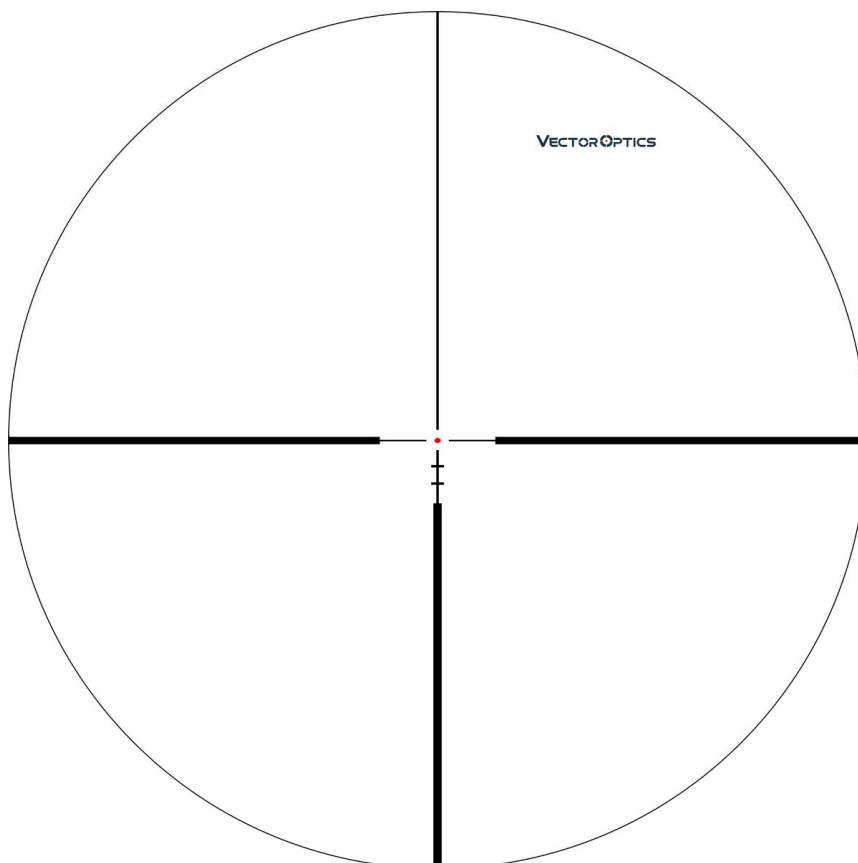


## **Continental 3-18x50SFP Riflescope SOLD OUT**

*Item No :SCOL-21*

Magnification:3-18x  
Objective Lens Dia.:50mm  
Ocular Lens Dia.:42mm (1.7 inch)  
Ocular Lens Length:54mm (2.1 inch)  
Exit Pupil:9.5-2.8mm  
Optics Coating:Fully-multi coat diamond clear  
Field of View:41.5-6.9 Feet @ 100 yards  
Field of View:13.8-23.M@ 100 meters  
Eye Relief:100mm (4.0 inch)  
Length:383mm (15.1 inch)  
Weight:630g (22.2 ounce)  
Tube Dia.:30mm Monotube  
Click Value:1/4 MOA  
Elevation Range:75MOA  
Windage Range:75MOA  
Parallax Setting:100 yards  
Side Focus:10 Yds to infinite  
Reticle:Etched glass VET-10BDC  
Illumination:Six gear  
Battery:CR2032  
Distance between objective lens part and middle turret: 64mm (2.5 inch)  
Length of middle turret part: 35mm (1.4 inch)  
Distance between middle turret part to power ring: 59mm (2.3 inch)  
Shock tested to 750g, water proof at 1m  
Light transmission reach to 90%  
Fully nitrogen purged to eliminate any fogging of the lenses internally  
Adjusting plate is NOT fixed, after zero the scope pull up the turret and re-set it to zero  
High quality 6061 T6 aircraft grade aluminum  
Focus mark: 10,15, 20, 30, 50, 75, 100, 200, 300, 500 and infinite  
Diopter compensation from fast-focus eyepiece (+2 to -3)  
Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, lens caps and cleaning cloth etc.



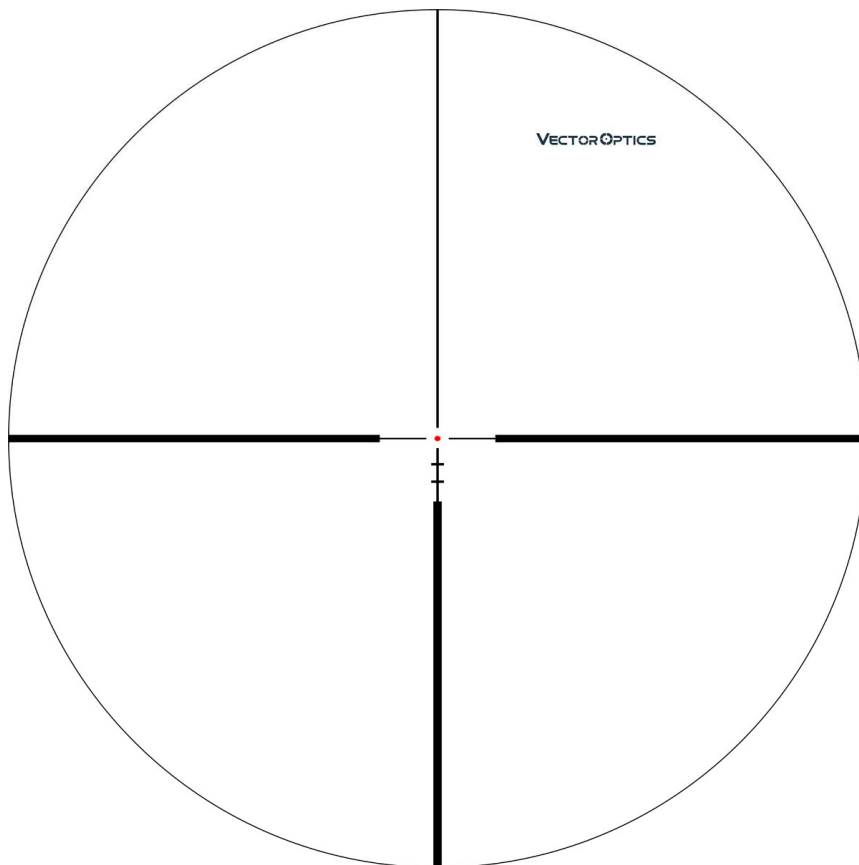

## **Continental 3-18x50SFP Tactical Riflescope SOLD OUT**


**Item No :SCOL-21T**


**Magnification: 3-18x**  
**Objective Lens Dia.: 50mm**  
**Ocular Lens Dia.: 42mm / 1.7 inch**  
**Ocular Lens Length: 54mm / 2.1 inch**  
**Exit Pupil: 9.5-2.8mm**  
**Optics Coating: Fully-multi coat diamond clear**  
**Field of View: 41.5-6.9 Feet @ 100 yards**  
**Field of View: 13.8-2.3M@ 100 meters**  
**Eye Relief: 100mm / 4.0 inch**  
**Length: 385mm / 15.2 inch**  
**Weight: 675g / 23.8 ounce**  
**Tube Dia.: 30mm Monotube**  
**Click Value: 1/10 MIL**  
**Elevation Range: >21.5MIL**  
**Windage Range: >21.5MIL**  
**Parallax Setting: 100 yards**  
**Side Focus: 10 Yds to infinite**  
**Reticle: Etched glass VCT-10**  
**Illumination: 6 gear**  
**Battery: CR2032**  
**Distance between objective lens part and middle turret: 63mm (2.5 inch)**  
**Length of middle turret part: 38mm (1.5 inch)**  
**Distance between middle turret part to power ring: 56mm (2.3 inch)**  
**Shock tested to 750g, water proof at 1m**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**Turret lock system. Coming with zero re-set feature**  
**High quality 6061 T6 aircraft grade aluminum**  
**Focus mark: 10,15, 20, 30, 50, 75, 100, 200, 300, 500 and infinite**  
**Diopter compensation from fast-focus eyepiece (+2 to -3)**  
**Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, instruction, DIY spare elevation turret, lens caps and cleaning cloth etc.**







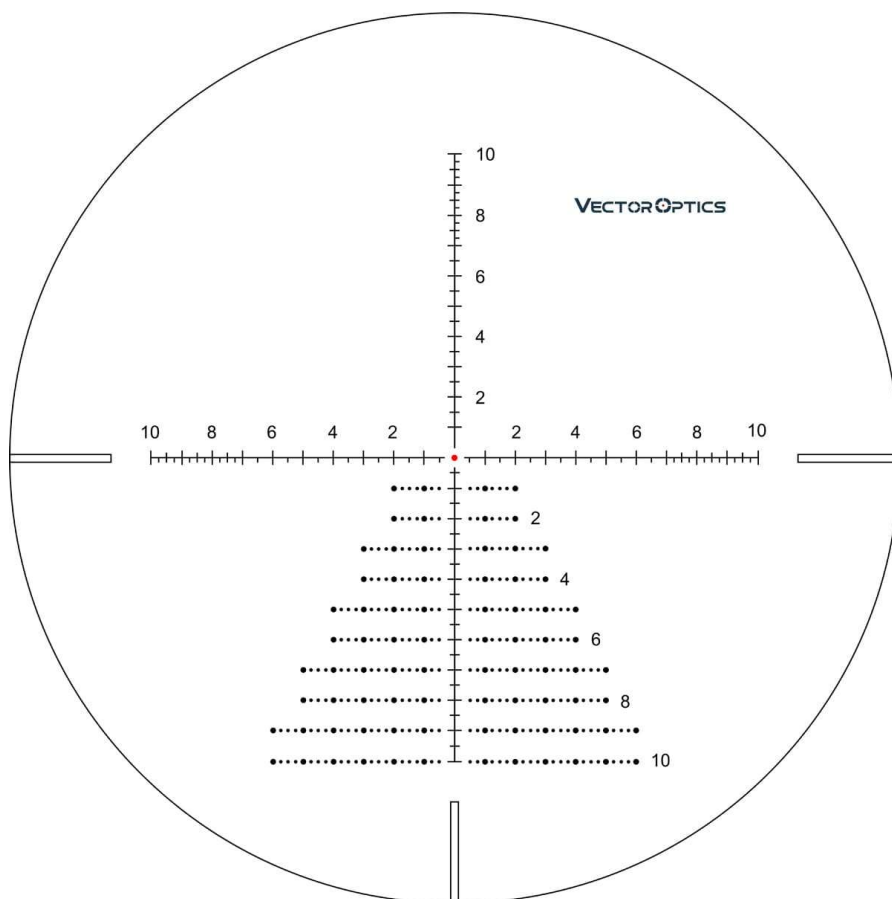

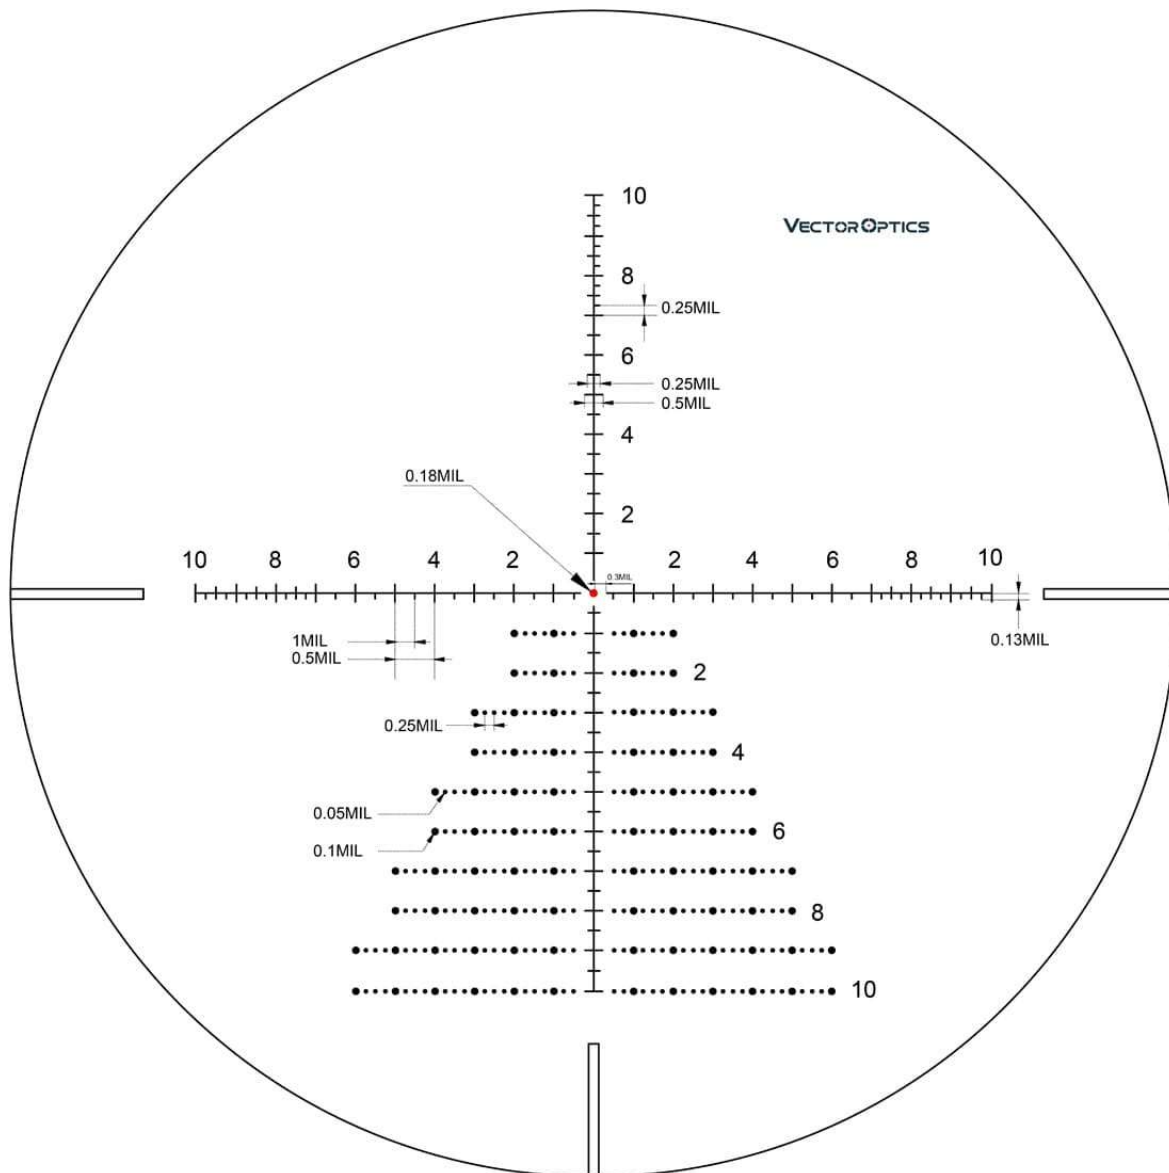

## **Continental 5-30x56SFP Riflescope SOLD OUT**



**Item No :SCOL-22**

**Crystal Clear Image, 30mm Monotube, Take Lapua Recoil  
Return-to-Zero Turret, Light Transmission Reaches to 90%, 15Yds  
to Infinite Focus  
Etched Glass Half Mil-dot Reticle, 1/4 MOA  
Adjust, Illuminated, HD Glass Reinforcement**

**Magnification:5-30x  
Objective Lens Dia.:56mm  
Ocular Lens Dia."42mm (1.7 inch)  
Ocular Lens Length:54mm (2.1 inch)  
Exit Pupil:9.5-1.9mm  
Optics Coating:Fully-multi coat diamond clear  
Field of View:24.9-4.2 Feet @ 100 yards  
Field of View:8.3-1.4M @ 100 meters  
Eye Relief:100mm (4.0 inch)  
Length:400mm (15.7 inch)  
Weight:630g (22.2 ounce)  
Tube Dia.:30mm Monotube  
Click Value:1/4 MOA  
Elevation Range:60MOA  
Windage Range:60MOA  
Parallax Setting:100 yards  
Side Focus:15 Yds to infinite  
Reticle:Etched glass half-mil  
Illumination:Six gear  
Battery:CR2032  
Distance between objective lens part and middle turret: 70mm (2.8 inch)  
Length of middle turret part: 35mm (1.4 inch)  
Distance between middle turret part to power ring: 56mm (2.2 inch)  
Shock tested to 750g, water proof at 1m  
Fully nitrogen purged to eliminate any fogging of the lenses internally  
Light transmission reach to 90%  
Adjusting plate is NOT fixed, after zero the scope pull up the turret and re-set it to zero  
High quality 6061 T6 aircraft grade aluminum  
Focus mark: 15, 20, 30, 50, 75, 100, 200, 300, 500 and infinite  
Diopter compensation from fast-focus eyepiece (+2 to -3)  
Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, lens caps and cleaning cloth etc.**





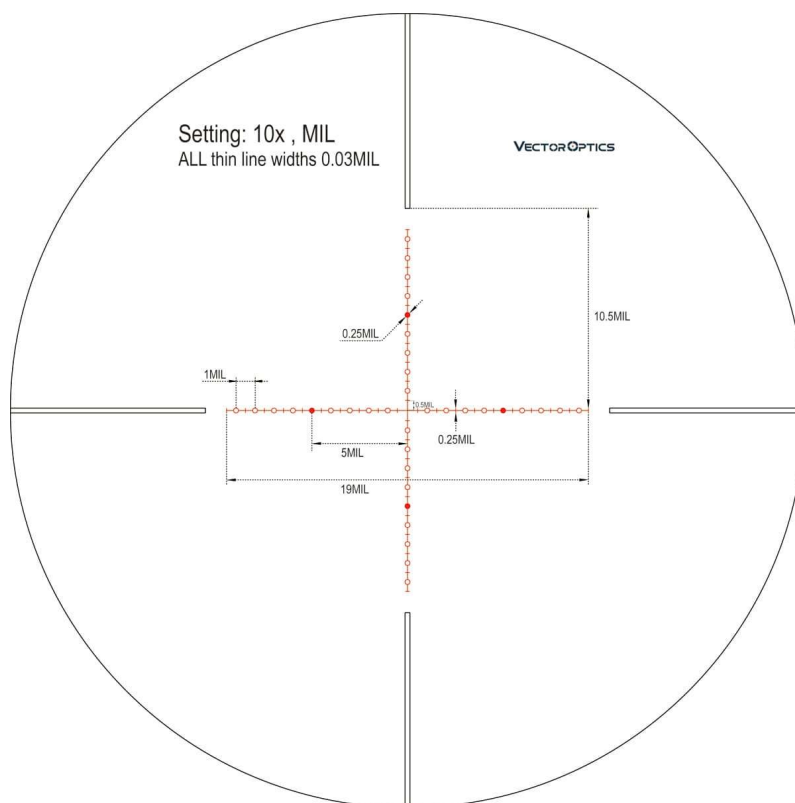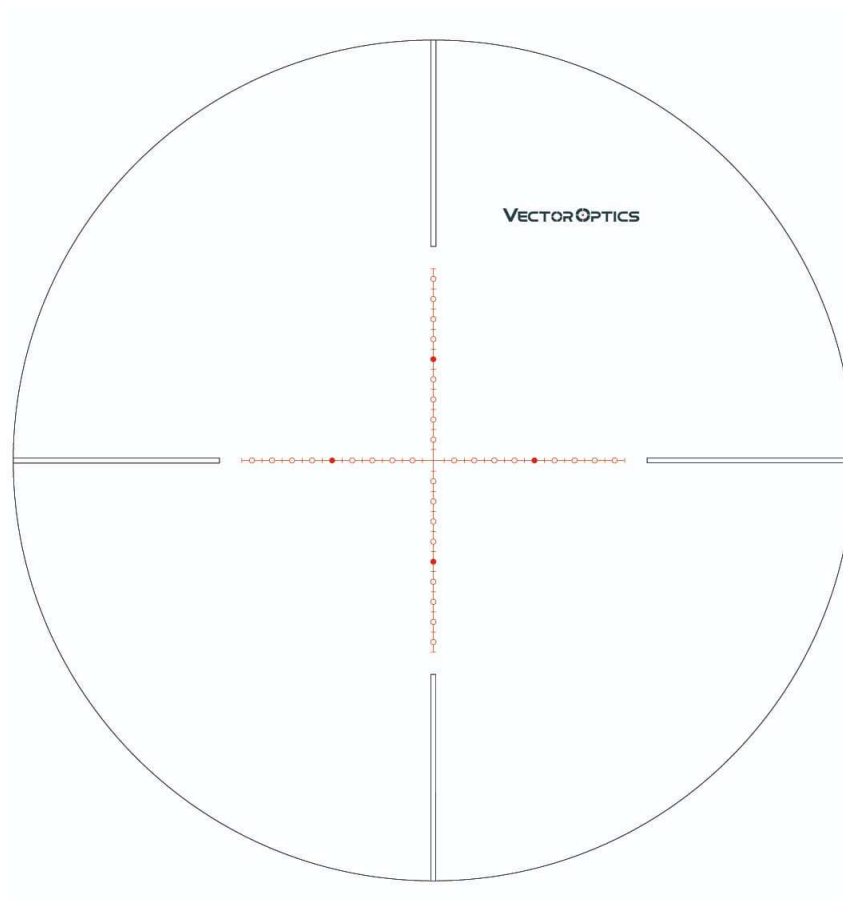


## **Continental 5-30x56SFP Tactical Riflescope SOLD OUT**


**Item No :SCOL-22T**

**Magnification: 5-30x**  
**Objective Lens Dia.: 56mm**  
**Ocular Lens Dia.: 42mm / 1.7 inch**  
**Ocular Lens Length: 54mm / 2.1 inch**  
**Exit Pupil: 9.5-1.9mm**  
**Optics Coating: Fully-multi coat diamond clear**  
**Field of View: 24.9-4.2 Feet@ 100 yards**  
**Field of View: 8.3-1.4M@ 100 meters**  
**Eye Relief: 100mm / 4.0 inch**  
**Length: 400mm / 15.7 inch**  
**Weight: 725g / 25.6 ounce**  
**Tube Dia.: 30mm Monotube**  
**Click Value: 1/10 MIL**  
**Elevation Range: >16.5MIL**  
**Windage Range: >17.5MIL**  
**Parallax Setting: 100 yards**  
**Side Focus: 15 Yds to infinite**  
**Reticle: Etched glass VCT-20**  
**Illumination: 6 gear**  
**Battery: CR2032**  
**Distance between objective lens part and middle turret: 72mm (2.8 inch)**  
**Length of middle turret part: 38mm (1.5 inch)**  
**Distance between middle turret part to power ring: 58mm (2.3 inch)**  
**Shock tested to 750g, water proof at 1m**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**Turret lock system. Coming with zero re-set feature**  
**High quality 6061 T6 aircraft grade aluminum**  
**Focus mark: 10,15, 20, 30, 50, 75, 100, 200, 300, 500 and infinite**  
**Diopter compensation from fast-focus eyepiece (+2 to -3)**  
**Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, instruction, DIY spare elevation turret, lens caps and cleaning cloth etc.**





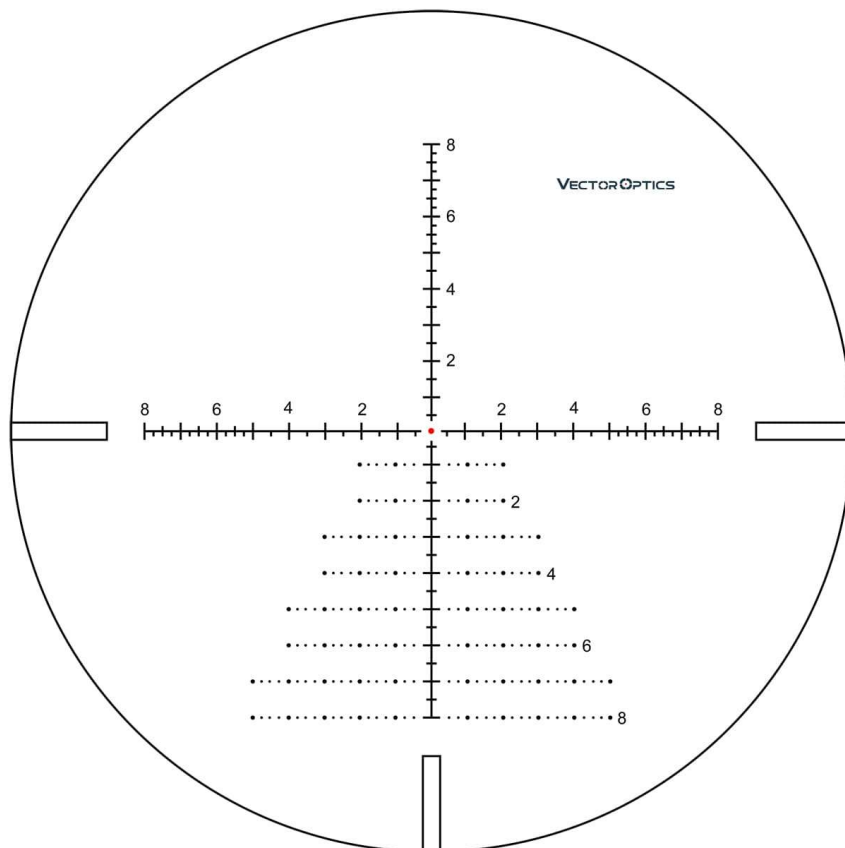

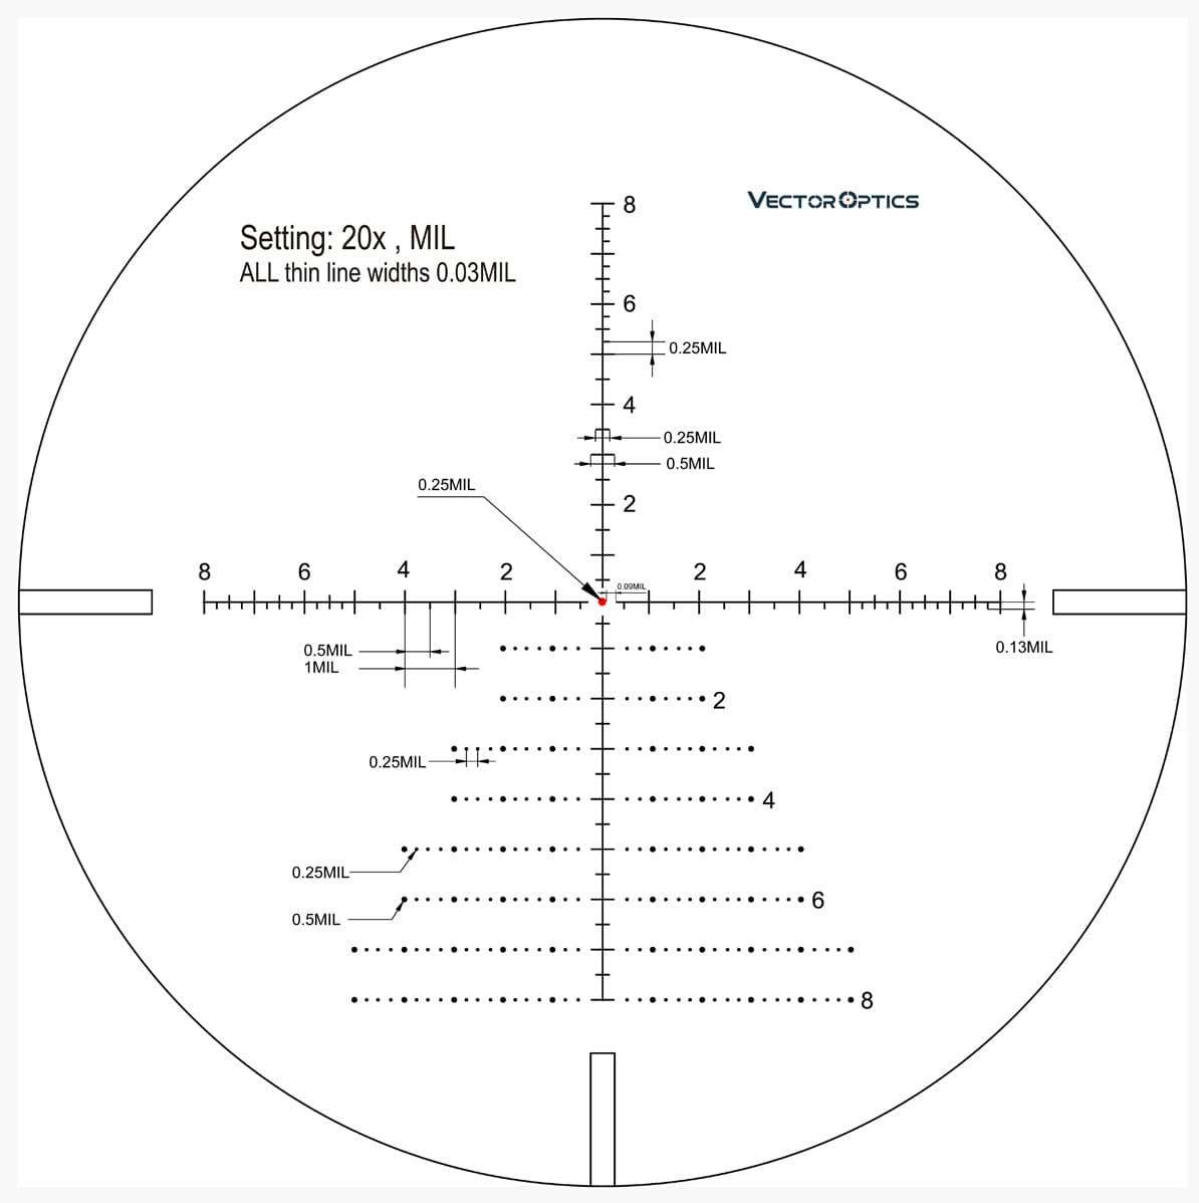


## **Marksman 6-25 x 50 FFP Mil Mil**

**Matte Difference Between Main Body and Turrest Makes The Scope More Tactical**  
**30mm Monotube With Exact Weight About 700g 24.7 oz**  
**Fully Multi Coated Reaches 85-87% Light Transmission**  
**4 inch Long Eye Relief With Wide Field of View & Edge-to-Edge Image**  
**Etched Glass Tactical Reticle That Can Take Lapua Magnum 338 Recoil**  
**1/10 MIL Low Profile Turret Adjustment With Re-Zero Feature total 17.5MIL Range**  
**With Power Ring Level, Mark Picatinny Scope Rings, Honeycomb Sunshade**

**Magnification: 6-24x**  
**Objective Lens Dia.: 50mm**  
**Ocular Lens Dia: 39mm**  
**Ocular Lens: 62mm**  
**Exit Purpil: 8.33--2.08mm**  
**Optics Coating: FMC**  
**Eye Relief: 100mm, 4.0"**  
**Field of View: 17.1-4.5" @ 100 yards**  
**Field of View: 5.21-1.38M @ 100 meters**  
**Field of View: 3.2-0.5°**  
**Length: 360mm / 14.2"**  
**Weight: 700g / 24.7 oz**  
**Tube Dia.: 30mm**  
**Click Value: 1/10MIL / 1cm / 0.1MRAD**  
**Elevation Range: 17.5MIL / 60MOA**  
**Windage Range: 17.5MIL / 60MOA**  
**Parallax Setting: 100 yards / 100 meters**  
**Side Focus: 10 to infinite**  
**Reticle: Etched glass VPA-MF**  
**Main Body Finish: Black matte**  
**Turrets Finish: Dark Silver**  
**Illumination: N/A**  
**Distance between objective lens part and middle turret: 70mm (2.8 inch)**  
**Length of middle turret part: 35mm (1.4 inch)**  
**Distance between middle turret part to power ring: 60mm (2.4 inch)**  
**Shock tested to 750g, water proof at 300 meters and 45 degree**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**Turret lock system. Coming with zero re-set feature**  
**High quality 6061 T6 aircraft grade aluminum**  
**Focus mark: 10, 15, 20, 25, 30, 40, 50, 60, 75, 100, 150, 300 and infinite**  
**Diopter compensation from fast-focus eyepiece (+2 to -3)**  
**Including items: 30mm picatinny high ring (default) or weaver or dovetail mount, instruction, lens caps and cleaning cloth etc**



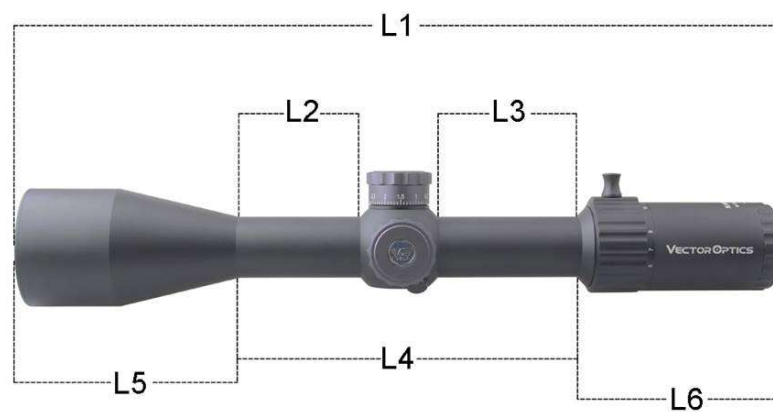

L1	L2	L3	L4	L5	L6
360mm / 14.2 inch	70mm / 2.8 inch	60mm / 2.4 inch	165mm / 6.5 inch	100mm / 3.9 inch	95mm / 3.7 inch



## **35mm Zalem 4-48x65SFP Riflescope SOLD OUT**

*Item No :SCOL-25*

True 12x Zoom Factor, Edge-to-Edge Image, Fully-multi Coated, 100mm 4" Eye Relief  
35mm Monotube Made of 6061 T6, Side Focus Min Starts from 20 Yards to Infinite  
By Using ED Glass on Objective lens Ensure Excellent Image at 48x Power for Long  
Range Shooting

1/8MOA Adjustment w/ Zero Reset & Turret Lock Feature, Total >55MOA Adjustment  
Range

Etched Glass VET-L338 Reticle Make You Measure Distance and Calculate Bullet Drop  
Compensation

Take Lapua Magnum 338 Recoil and All Fields of Application for Hunting, Sporting &  
Competition.

**Magnification: 4-48x**

**Objective Lens Dia.: 65mm**

**Ocular Lens Dia.: 39mm / 1.5 inch**

**Ocular Lens Length: 66mm / 2.6 inch**

**Exit Pupil: 12-1.35mm**

**Optics Coating: Fully-multi coat**

**Field of View: 26.7-2.3 feet@100 yards**

**Field of View: 5.1-0.43°**

**Eye Relief: 104-94mm / 4.1-3.7 inch**

**Length: 435mm / 17.1 inch**

**Weight: 1140g / 40.2 ounce**

**Tube Dia.: 35mm Monotube**

**Click Value: 1/8 MOA**

**Elevation Range: >55MOA**

**Windage Range: >55MOA**

**Parallax Setting: 100 yards**

**Side Focus: 20 Yds to infinite**

**Reticle: Etched glass VET-L338**

**Illumination: 11 gear red**

**Battery Type: CR2032**

**Reticle Usage at 10x Power, reticle especially designed for Lapua Magnum 338 long  
range shooting max 1400 meters**

**Distance between objective lens part and middle turret: 74mm (1.8 inch)**

**Length of middle turret part: 37mm (1.6 inch)**

**Distance between middle turret part to power ring: 88mm (2.5 inch)**



**Shock tested to 1200g and water proof**

**Fully nitrogen purged to eliminate any fogging of the lenses internally**

**High quality 6061 T6 aircraft grade aluminum**

**Dioptr compensation from fast-focus eyepiece (+2 to -3)**

**Including items: 35mm picatinny high ring, 3" sunshade, flip-up caps and cleaning  
cloth etc.**

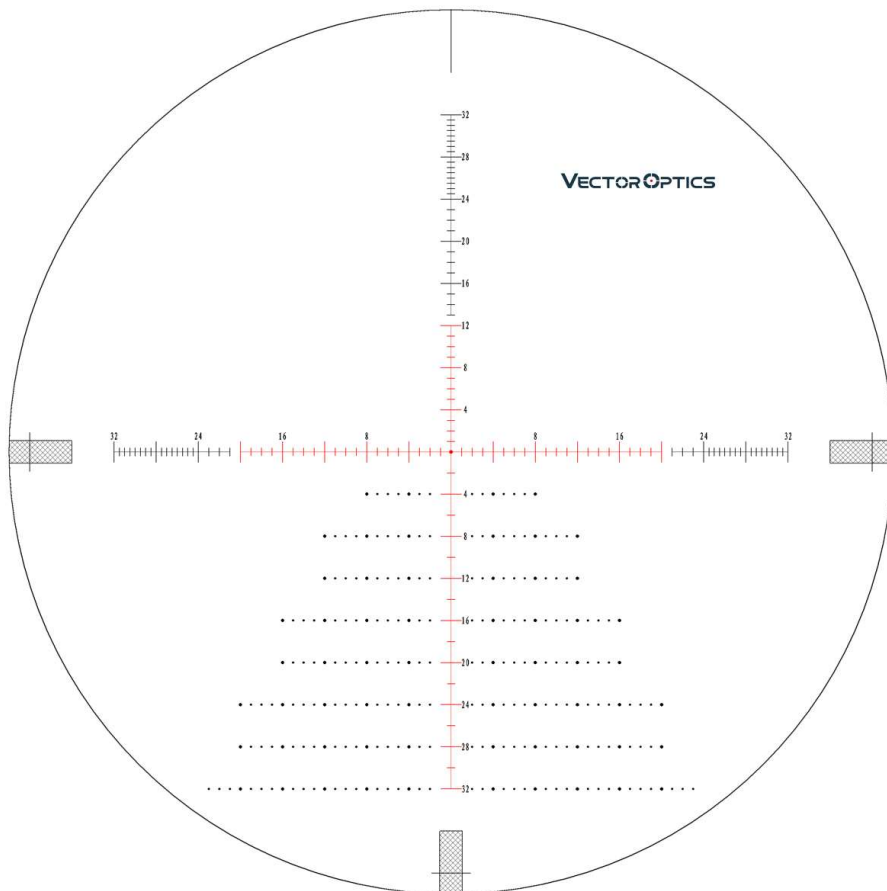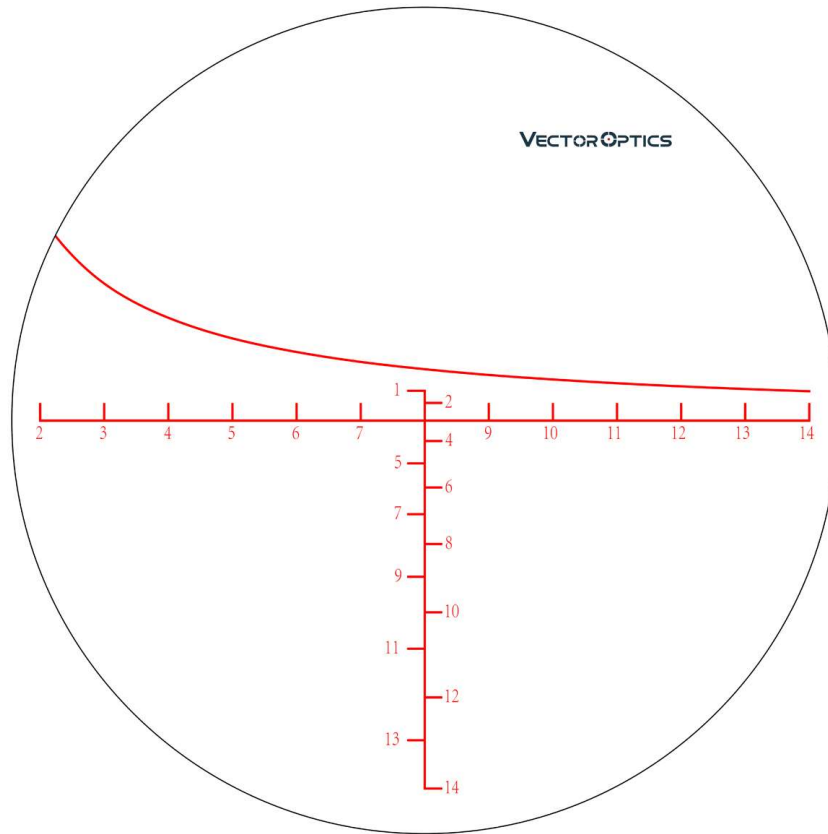












**25mm tube range**

**SCOM-30P Hugo 3-12x44 1" SFP (P) OUT OF STOCK !!!!**




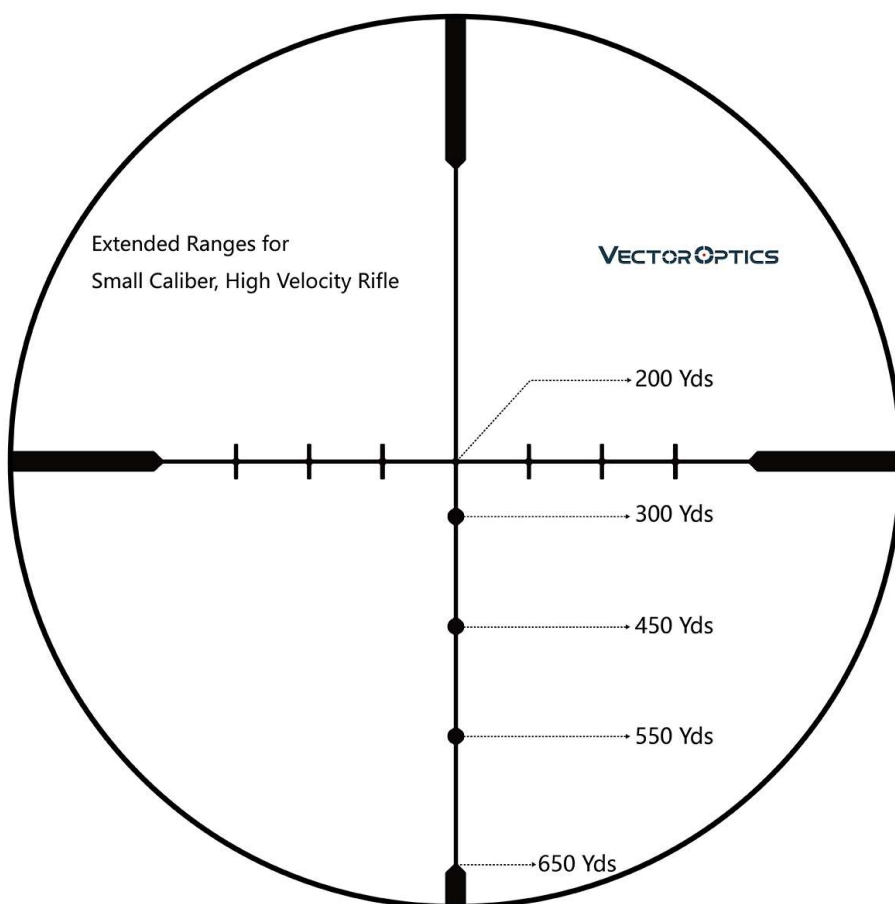

**Magnification: 3-12x**  
**Objective Lens Dia.: 44mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 14.6-4.0mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 31.5-7.9 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 325mm / 12.8 inch**  
**Weight: 595g / 21.2 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 60MOA**  
**Windage Range: 60MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOW-10BDC**  
**Illumination: None**  
**BDC & ranging reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 48mm (1.9 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 25, 50, 100, 200 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: weaver rings (default) or dovetail rings, lens caps, sunshade and cleaning cloth etc.**

### **SCOM-31P Hugo 3-12x44GT 1" SFP (P)**




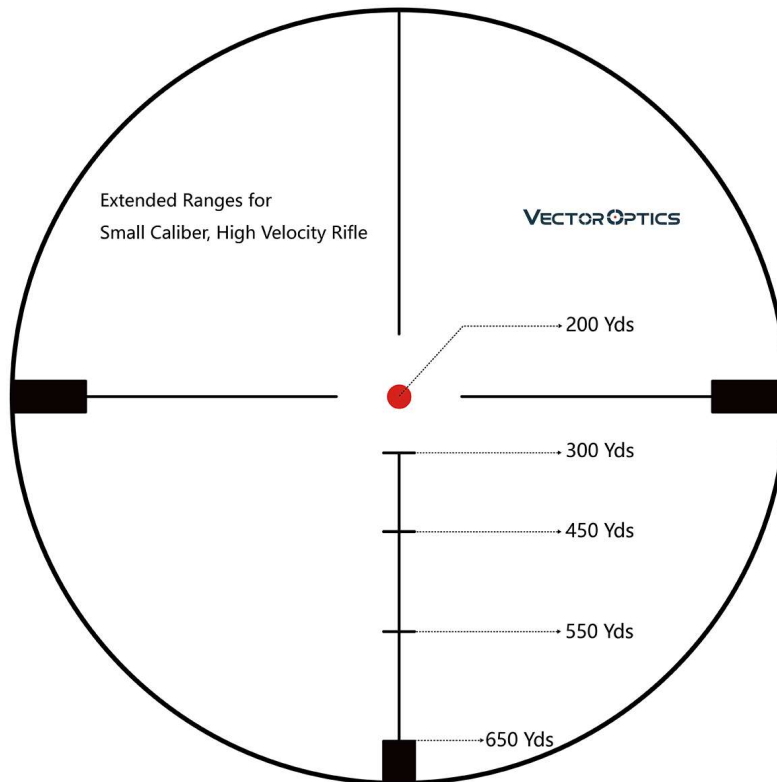


**Magnification: 3-12x**  
**Objective Lens Dia.: 44mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 14.6-4.0mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 31.5-7.9 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 325mm / 12.8 inch**  
**Weight: 620g / 21.9 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 60MOA**  
**Windage Range: 60MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOI-10BDC**  
**Illumination: 11 levels red+ 1 level NV**  
**Battery Type: CR2032**  
**BDC & ranging reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 48mm (1.9 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 25, 50, 100, 200 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: weaver rings (default) or dovetail rings, lens caps, sunshade and cleaning cloth etc.**




**SCOL-29P Hugo 4-16x44 1" SFP (P) OUT OF STOCK**

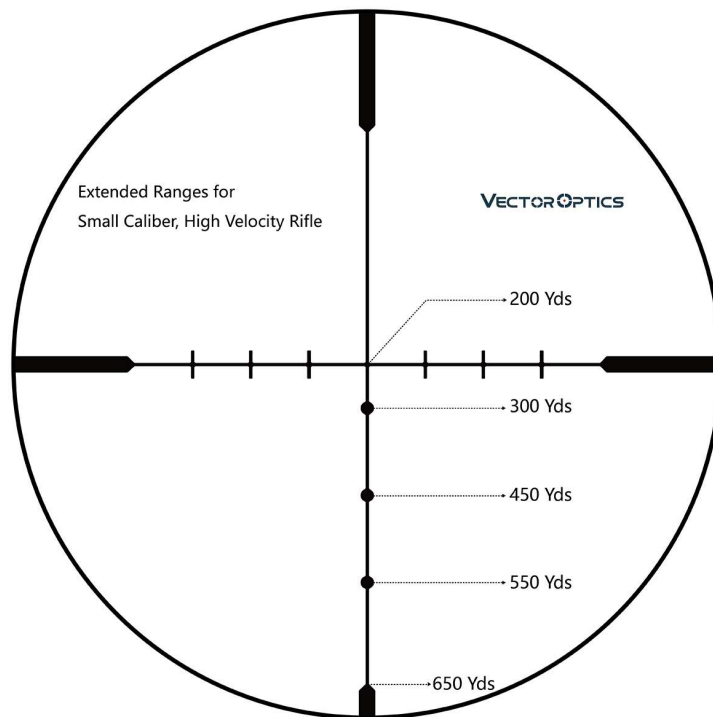


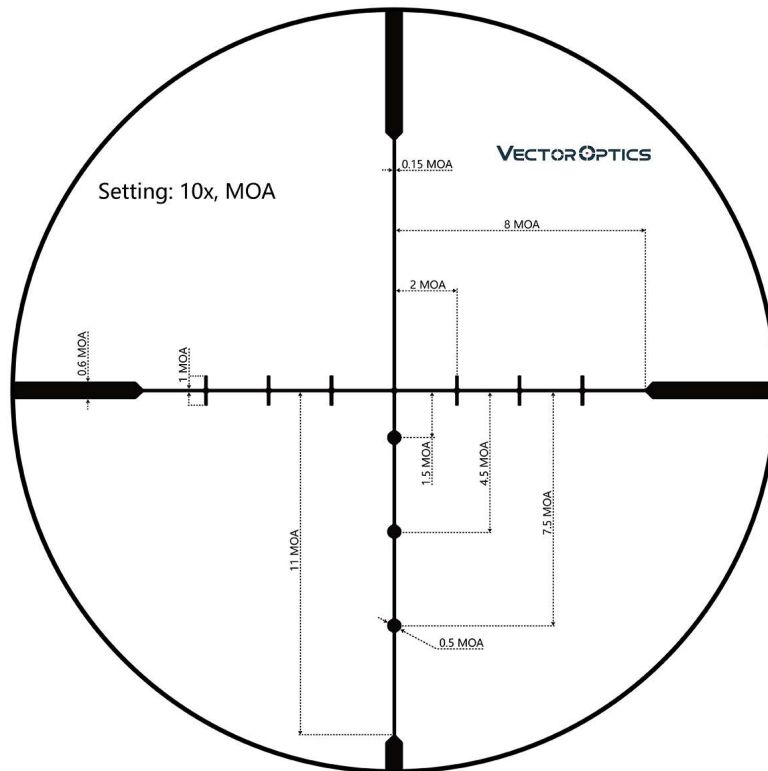

**Magnification: 4-16x**  
**Objective Lens Dia.: 44mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 11-2.7mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 21.1-5.3 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 340mm / 13.4 inch**  
**Weight: 625g / 22.0 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 50MOA**  
**Windage Range: 50MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOW-10BDC**  
**Illumination: None**  
**BDC & ranging Reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 59mm (2.3 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 25, 50, 100, 200, 500 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Accessories included: weaver rings (default) or dovetail rings, flip-up caps, sunshade and cleaning cloth etc.**


## SCOL-30P Hugo 4-16x44GT 1" SFP (P)

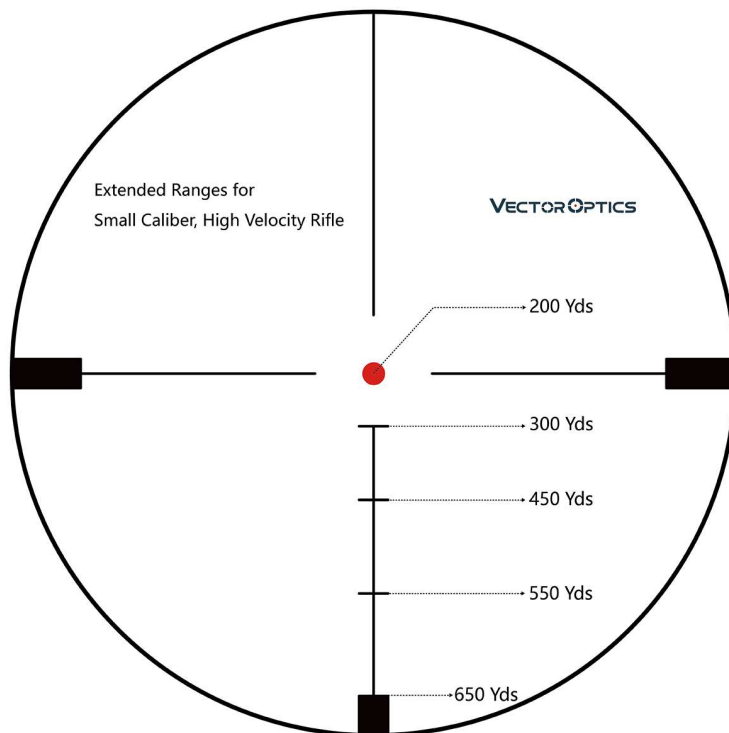


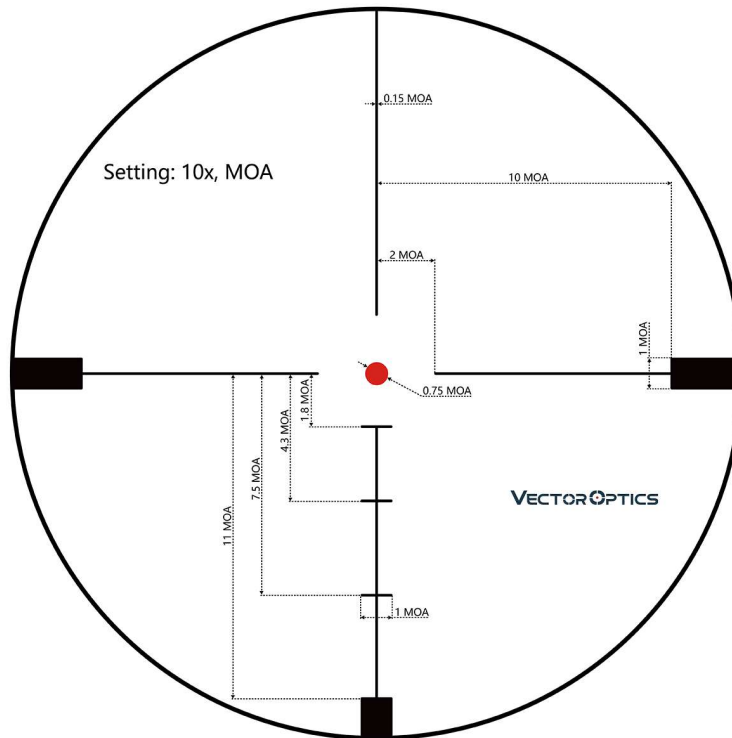

**Magnification: 4-16x**  
**Objective Lens Dia.: 44mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 11-2.7mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 21.1-5.3 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 340mm / 13.4 inch**  
**Weight: 650g / 23.0 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 50MOA**  
**Windage Range: 50MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOI-10BDC**  
**Illumination: 11 levels red+ 1 level NV**  
**Battery Type: CR2032**  
**BDC Reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 60mm (2.4 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 25, 50, 100, 200, 500 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: weaver rings (default) or dovetail rings, flip-up caps, sunshade and cleaning cloth etc.**

**SCOL-31P Hugo 6-24x50 1" SFP (P) SOLD OUT**

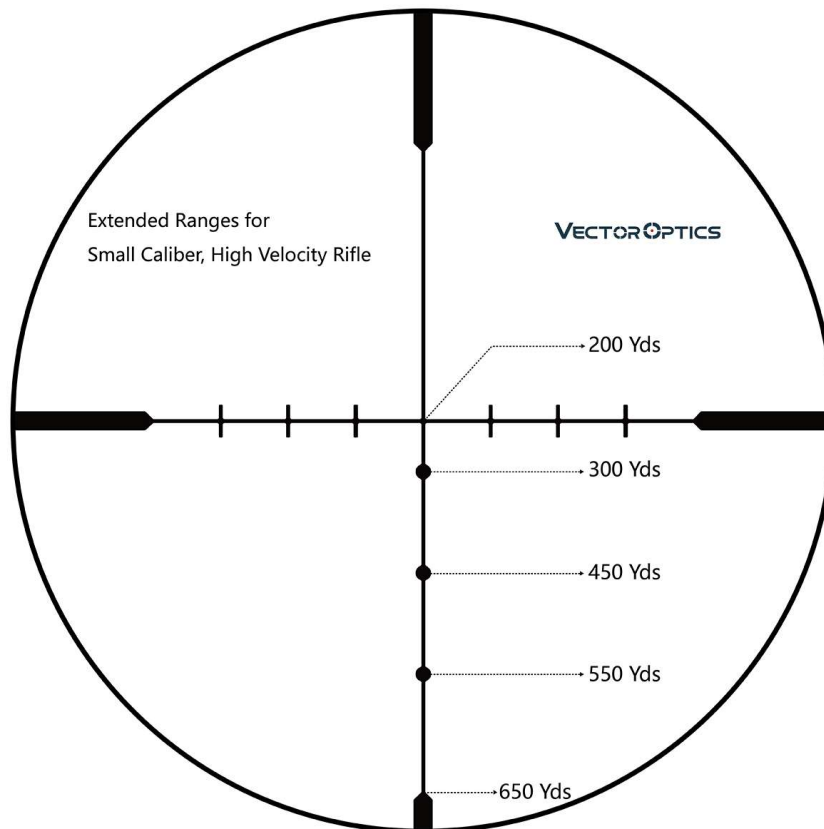


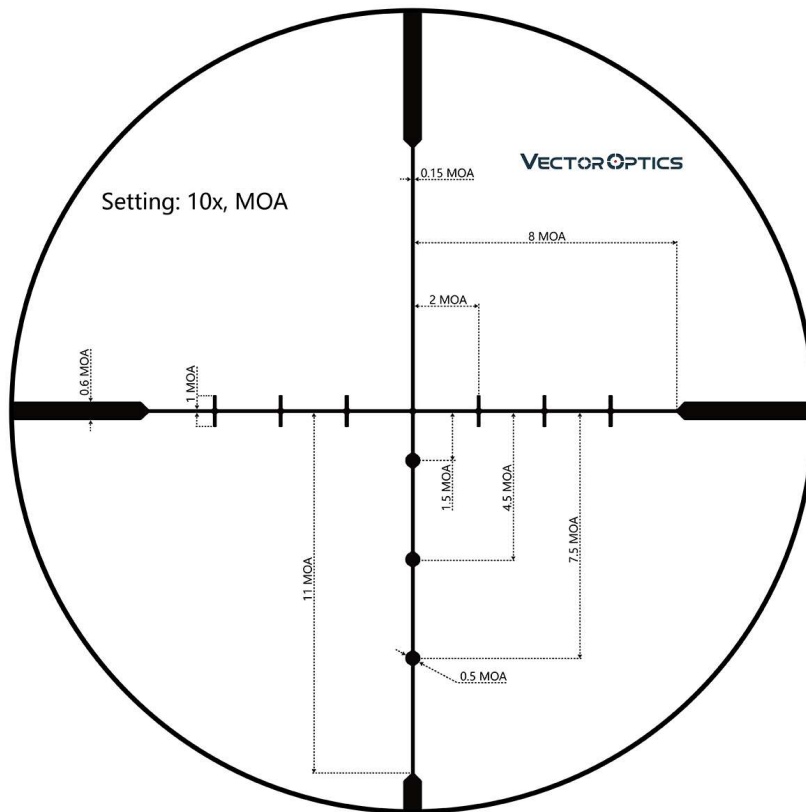


**Magnification: 6-24x**  
**Objective Lens Dia.: 50mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 8.3-2mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 15.8-4.0 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 360mm / 14.2 inch**  
**Weight: 660g / 23.3 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 40MOA**  
**Windage Range: 40MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOW-10BDC**  
**Illumination: None**  
**BDC & ranging reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 58mm (2.3 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 25, 50, 100, 200, 500 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Accessories included: weaver rings (default) or dovetail rings, sunshade, flip-up capss and cleaning cloth etc.**

## **SCOL-32 Hugo 6-24 x 50 GT**

**Fully Multi Coated, Edge-to-Edge Image, Wide Field of View, Side Focus Min 10 Yds  
4x Zoom Factor, 4 Inch Long Eye Relief, 25.4mm 1 Inch Monotube Made of 6061 T6  
1/4MOA Zero Reset & Turret Lock, Etched Glass BDC Reticle, Center Dot Illuminated**



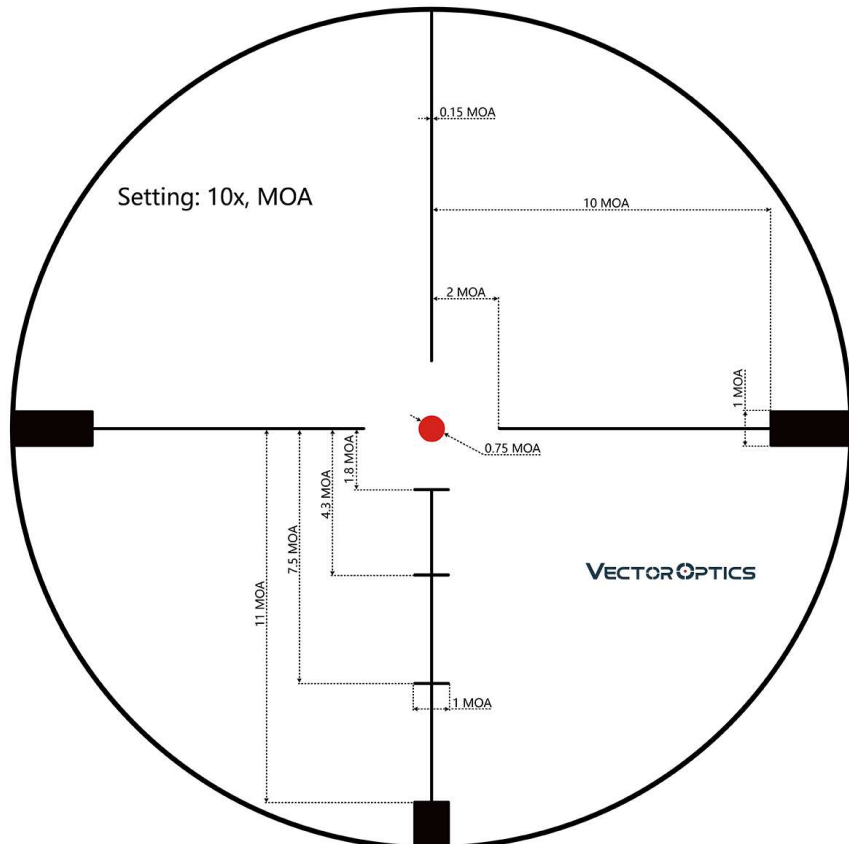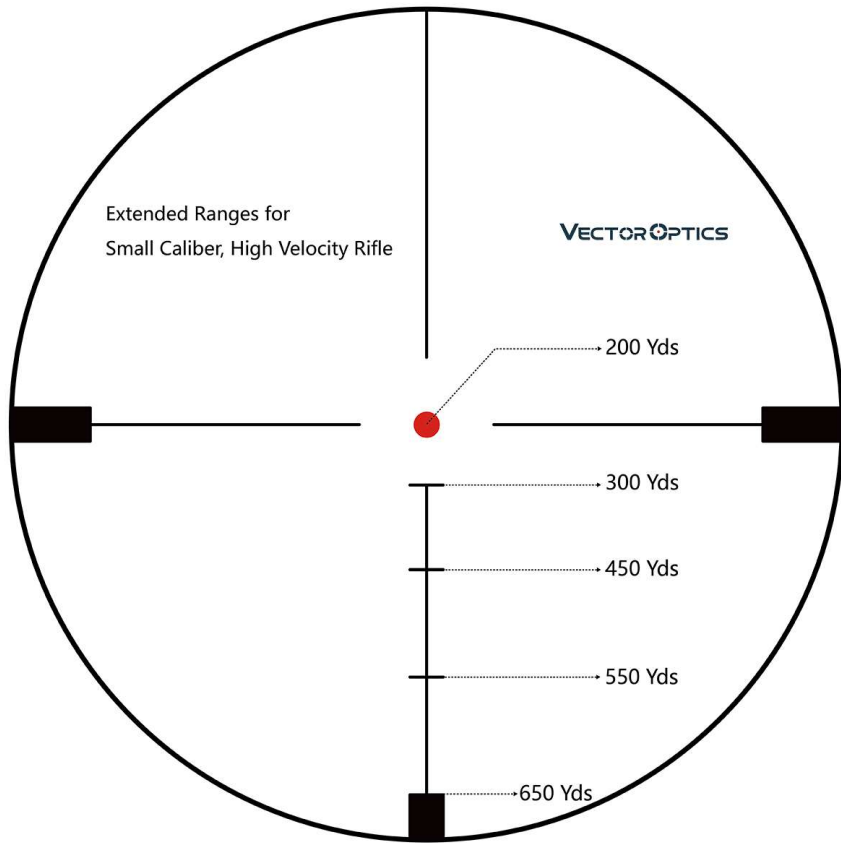



**Magnification: 6-24x**  
**Objective Lens Dia.: 50mm**  
**Ocular Lens Dia.: 38mm / 1.5 inch**  
**Ocular Lens Length: 60mm / 2.4 inch**  
**Exit Pupil: 8.3-2mm**  
**Optics Coating: Fully-multi coat**  
**Field of View: 15.8-4.0 feet@100 yds**  
**Eye Relief: 105--100mm / 4.1-3.9 inch**  
**Length: 360mm / 14.2 inch**  
**Weight: 680g / 24.0 ounce**  
**Tube Dia.: 25.4mm 1" Monotube**  
**Click Value: 1/4 MOA**  
**Elevation Range: 40MOA**  
**Windage Range: 40MOA**  
**Parallax Setting: 10 yards to infinite**  
**Reticle: VOI-10BDC**  
**Illumination: 11 levels red+ 1 level NV**  
**Battery Type: CR2032**  
**BDC Reticle usage set at 10x power, big game, 22LR Rimfire and varmint rifles max to 600 yards range**  
**Distance between objective lens part and middle turret: 58mm (2.3 inch)**  
**Length of middle turret part: 37mm (1.5 inch)**  
**Distance between middle turret part to power ring: 57mm (2.2 inch)**  
**Side focus marks: 10, 15, 20, 50, 100, 200, 500 and infinite yds**  
**Shock tested to 750g and water proof**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: weaver rings (default) or dovetail rings, flip-up caps, sunshade and cleaning cloth etc.**

## **34mm Continental 3-18x50FFP Riflescope**

**Item No :SCFF-28**





7075 T6 Adjustment Sys  
Dead On Accuracy

German Schott Glass  
Superior Clarity Resolution

LaREE Lens & VePRO FMC  
>90% Light Transmission

6X  
ZOOM

6  
levels Illuminated


Shock Proof

SWAT  
Tactical Style

## **34mm Continental 4-24x56FFP Riflescope**

**Item No :SCFF-29**



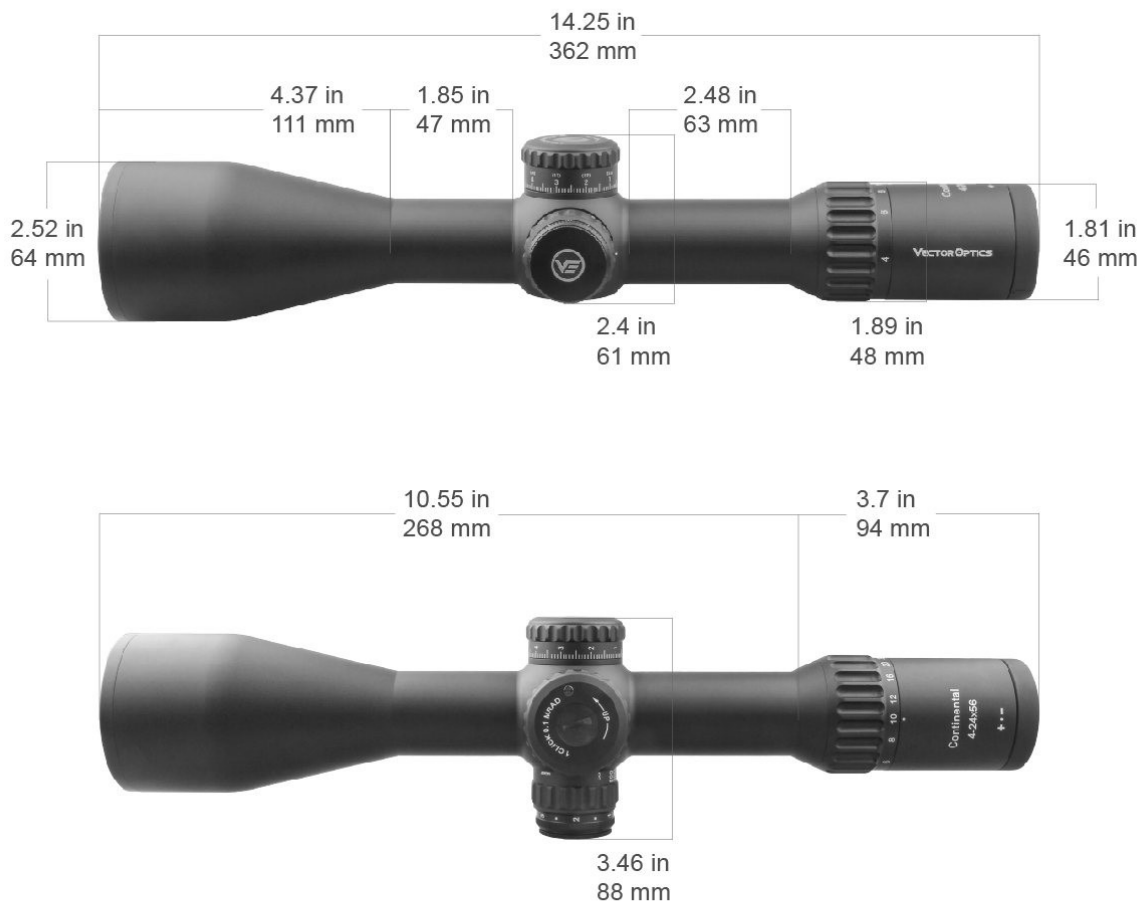

## **Vector Optics Top Premium Line That Can Compete Most Worldwide Famous Brand Optics**

34mm Monotube Made of 6061 T6, First Focal Plane Scope with German Schott ED HD Glass

German Optics System by Using LaREE Lens & VePRO FMC, > 90% Light Transmission

Very Little Distortion, Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting

True 6x Zoom Factor, Constant 4" Eye Relief without Inside Dark Ring Around Image

6 Levels Red Illumination, Side Focus Parallax Min Starts from 10 Yards to Infinite

Adjustment System Made of 7075 T6 That Never Snag on Anything and Never Get Turned

1/10MIL Adjustment Zero-Stop & Turret Lock, 100 Clicks per Round, 34MIL

Elevation Range

Etched Glass VCT-34FFP Tactical MIL Reticle, Center Dot Illuminated with Digital Lines & Dots

Take Lapua Magnum 338 Recoil and All Fields of Application for Hunting, Sporting & Competition

- Magnification: 4-24x
- Objective Lens Dia.: 56mm
- Ocular Lens Dia.: 42mm / 1.7 inch
- Ocular Lens Length: 54mm / 2.1 inch
- Exit Pupil: 8-2.3mm
- Optics Coating: Fully-multi coat diamond clear
- Field of View: 30.6-5.1 feet @100 yards
- Field of View: 5.9-1.0°
- Eye Relief: 100mm / 4.0 inch
- Length: 362mm / 14.3 inch
- Weight: 780g / 27.5 ounce
- Tube Dia.: 34mm Monotube
- Click Value: 1/10 MIL
- Elevation Range: 34MIL
- Windage Range: 16MIL
- Side Focus: 10 Yds to infinite
- Reticle: Etched glass VCT-34FFP
- Illumination: 6 gear red

- Battery type: CR2032
- Length of middle turret part: 48mm (1.9 inch)
- Shock tested to 1000g, water proof at 1 meter for 30 min
- Fully nitrogen purged to eliminate any fogging of the lenses internally
- 100 clicks per round, turret lock and zero stop feature
- High quality 6061 T6 aircraft grade aluminum
- Focus mark: 10,15, 20, 30, 50, 100, 200, 300, 500 and infinite
- Diopter compensation from fast-focus eyepiece (+2 to -3)
- Including items: 34mm picatinny high rings (default) or weaver or dovetail rings, sunshade, instruction, lens caps and cleaning cloth

## 34mm Continental 5-30x56FFP Riflescope

*Item No :SCFF-30*

SRP Vat Inc R 15999-00

Wholesale Xvat R 9938-00







**Vector Optics Top Premium Line That Can Compete Most Worldwide Famous Brand Optics**

**34mm Monotube Made of 6061 T6, First Focal Plane Scope with German Schott ED HD Glass**

**German Optics System by Using LaREE Lens & VePRO FMC, > 90% Light Transmission**

**Very Little Distortion,**

**Extra-Low Dispersion, Excellent for Dawn, Dusk Even at Night Shooting**

**True 6x Zoom Factor, Constant 4" Eye Relief without Inside Dark Ring Around Image**

**6 Levels Red Illumination, Side Focus Parallax Min Starts from 10 Yards to Infinite**

**Adjustment System Made of 7075 T6 That Never Snag on Anything and Never Get Turned**



**1/10MIL Adjustment Zero-Stop & Turret Lock, 100 Clicks per Round, 26MIL Elevation Range**

**Etched Glass**

**VCT-34FFP Tactical MIL Reticle, Center Dot Illuminated with Digital Lines & Dots**

**Take Lapua Magnum 338 Recoil and All Fields of Application for Hunting, Sporting & Competition**

**Magnification: 5-30x**

**Objective Lens Dia.: 56mm**

**Ocular Lens Dia.: 42mm / 1.7 inch**

**Ocular Lens Length: 54mm / 2.1 inch**

**Exit Pupil: 8-1.8mm**

**Optics Coating: Fully-multi coat diamond clear**

**Field of View: 24.5-4.1 feet @100 yards**

**Field of View: 4.7-0.8°**

**Eye Relief: 100mm / 4.0 inch**

**Length: 392mm / 15.4 inch**

**Weight: 810g / 28.6 ounce**

**Tube Dia.: 34mm Monotube**

**Click Value: 1/10 MIL**

**Elevation Range: 26MIL**

**Windage Range: 16MIL**

**Side Focus: 10 Yds to infinite**

**Reticle: Etched glass VCT-34FFP**

**Illumination: 6 gear red**

**Battery type:CR2032**

**Length of middle turret part: 48mm (1.9 inch)**

**Shock tested to 1000g, water proof at 1 meter for 30 min**

**Fully nitrogen purged to eliminate any fogging of the lenses internally**

**100 clicks per round, turret lock and zero stop feature**

**High quality 6061 T6 aircraft grade aluminium**

**Focus mark: 10,15, 20, 30, 50, 100, 200, 300, 500 and infinite**

**Dioptrre compensation from fast-focus eyepiece (+2 to -3)**

**Including items: 34mm picatinny high rings (default) or weaver or dovetail rings, suns hade, instruction, lens caps and cleaning cloth**

## **Everest 3-18x50SFP Gen II Riflescope**

***Item No :SCOL-06II***

**GenII, 30mm Monotube, Etched Glass MPX Reticle, 1/4" Turret Adjust,**

**Fully-Multi Coated, Side Focus Min 10 Yards, Flip-up Caps & Honeycomb Shade**

**Magnification: 3-18x**

**Objective Lens: 50mm**

**Ocular Lens Dia.:39mm**

**Ocular Lens Length: 55mm**

**Exit Pupil: 10-2.8mm**  
**Optics Coating: Fully multi coated**  
**Field of View: 38.2-6.2 feet @ 100 yards**  
**Eye Relief: 95-92mm (3.7-3.6")**  
**Length: 355mm (14.0")**  
**Weight: 740g (26.1oz)**  
**Tube Dia.:30mm**  
**Click Value: 1/4 MOA**  
**Elevation Range: 60MOA**  
**Windage Range: 60MOA**  
**Parallax Adjustment:10, 15, 205, 50, 100, 200, 500, ∞**  
**Reticle: MPTR-2**  
**Illumination: N/A**  
**Finish: Black matte**  
**Compact, light weight and durable**  
**Middle turret part: 38mm (1.5")**  
**Middle turret part to power ring: 56mm (2.2")**  
**Middle turret part to power ring: 64mm (2.5")**  
**Shock tested to 750g and water resistant**  
**Fully nitrogen purged to eliminate any fogging of the lenses internally**  
**High quality 6061 T6 aircraft grade aluminum**  
**Diopter compensation from fast-focus eyepiece (+2 to -2)**  
**Including items: scope weaver rings, honeycomb sunshade flip-up caps, retail package and cleaning cloth etc.**  
**Vendor: Vector Optics**  
**SKU: SCOL-06II**





